Achievable Rates for Discrete Memoryless Multicast Networks With and Without Feedback

Youlong Wu

arXiv:1504.04515v3 [cs.IT] 3 Aug 2016

Abstract

Coding schemes for discrete memoryless multicast networks (DM-MN) with rate-limited feedback from the receivers and relays to the transmitter are proposed. The schemes improve over the noisy network coding proposed by Lim *et al.*. For the single relay channel with relay-transmitter feedback, our coding schemes recover Gabbai and Bross's results, and strictly improve on noisy network coding, distributed decode-forward coding proposed by Lim *et al.*, and all known lower bounds on the achievable rates proposed for the setup without feedback.

The coding schemes are based on block-Markov coding, superposition coding, sliding-window/backward decoding and hybrid relaying strategies. In our Scheme 1A, the relays and receivers use compress-forward strategy and send the compression indices to the transmitter through the feedback pipes. After obtaining the compression indices through feedback, the transmitter sends them together with the source message. Each receiver uses backward decoding to jointly decode the source message and all compression indices. Our Scheme 1B is similar, except that here each relay not only uses compress forward to compress its channel outputs, but also performs partial decode forward to decode a common part of source message. Our Scheme 1C allows different relays to decode different parts of the source message (in Scheme 1A, no relay decodes any part of the source message; in Scheme 1B, all relays decode the same part of source message), which can achieve higher rates than Scheme 1A and Scheme 1B.

Motivated by the feedback coding scheme, we propose a new coding scheme for DM-MN *without* feedback, where the transmitter decodes the compression indices instead of obtaining them directly through feedback. It is shown that the scheme still improves noisy network coding and distributed decode-forward coding for some channels.

I. INTRODUCTION

The relay channel [1] describes a 3-node communication channel where the transmitter sends a message to the receiver with the assistance of a relay. Cover and El Gamal [2] proposed two basic coding strategies: compress-forward and decode-forward that are based on block-Markov coding. The compress-forward strategy has the relay compress its outputs and send the compression index to the receiver. The decode-forward strategy has the relay first decode all or part of the message and then send the decoded message to the receiver. Both strategies have been generalized to multiple-relay channels in [3], [4], [5], [6], [7]. The compress-forward strategy was later extended to multi-message multicast and multi-messages networks, the so called *noisy network coding* (NNC) [8], [9]. Recently, a *distributed decode-forward coding* (DDF) scheme was proposed for multicast [10] and broadcast relay networks [11], which uses the partial decode-forward strategy at the relays and backward encoding at the transmitter. For N-node Gaussian relay networks, both NNC and DDF achieve within constant gap from the capacity.

Decode-forward and compress-forward require sophisticated operations. A much simpler strategy, called amplify-forward, was introduced by Schein and Gallager [12] for the 4-node Gaussian diamond network. When using amplify-forward, the relay scales its received signal and forwards it to the receiver. The amplify-forward stragegy was generalized to multihop relay networks in [13], [14], [15]. A hybrid coding scheme that unifies both amplify-forward and NNC for general noisy relay networks was proposed in [16].

A different line of works concentrated on the relay channel with feedback [2], [17]. In [2] it was shown that perfect feedback from the receiver to the relay makes the relay channel *physically degraded*, and therefore decode-forward achieves capacity. For the case of feedback from the receiver or relay to

---

This paper was in part presented at the *IEEE Information Theory Workshop*, in Jeju, Korea, Oct 2015, and at the *53rd Annual Allerton Conference on Communication, Control, and Computing* , in Monticello, IL, USA, Sep 2015.

the transmitter, the capacity is unknown in general. In [17] Gabbai and Bross studied this problem and proposed inner bounds by using restricted decoding and deterministic partitioning [18]. It was shown that feedback can strictly improve the no-feedback inner bounds achieved by the compress-forward and decode-forward strategies for some relay channel, for example, the general Gaussian relay channel and Z relay channel.

In this paper, we consider the general discrete memoryless multicast network (DM-MN) with feedback. This network consists of $N \geq 3$ nodes where the transmitter sends a source message to different receivers with the assistance of multiple relays, and each receiver or relay can send feedback signals through a noiseless but rate-limited feedback pipe to the transmitter. We propose new coding schemes based on block-Markov coding, superposition coding, sliding-window/backward decoding and hybrid relaying strategies. Specifically, in our Scheme 1A, the relays and receivers use compress-forward strategy and send the compression indices to the transmitter through the feedback pipes. After obtaining the compression indices through feedback, the transmitter sends them together with the source message. Each receiver uses backward decoding to jointly decode the source message and all compression indices. Our Scheme 1B is similar, except that here each relay not only uses compress forward to compress its channel outputs, but also performs partial decode forward to decode a common part of source message. Our Scheme 1C allows different relays to decode different parts of the source message (in Scheme 1A, no relay decodes any part of the source message; in Scheme 1B, all relays decode the same part of source message), which can achieve higher rates than Scheme 1A and Scheme 1B.

Our coding schemes (Scheme 1A-1C) are reminiscent of the NNC scheme for general networks [8], [9] in the sense that the relays and receivers compress their channel outputs and broadcast the compression messages. However, we introduce combined compress-forward and partial decode-forward strategy into the relay networks. Moreover, our schemes have the transmitter *forward* the receivers' and relays' compression messages, instead of creating a new compression message. This is similar to the schemes proposed in [19] for the broadcast channel with feedback, where the transmitter forwards the receivers' compression messages. Finally, since the transmitter knows the source message and can obtain the compression messages through feedback, we are able to superpose the transmitter's input on the receivers' and relays' inputs, establishing cooperation between the transmitter and the receivers&relays. It is shown that our coding schemes generalize Gabbai and Bross's results [17] for the relay channel with relay-transmitter feedback. For some channels, such as the Gaussian relay channel and Z relay channels, our coding schemes strictly improve over the NNC, the DDF, and all known lower bounds on the achievable rate in the absence of feedback.

Motivated by our feedback coding schemes, we propose a new scheme for DM-MN *without* feedback. The key idea is that in each block, instead of obtaining compression messages directly through the feedback pipes, the transmitter *decodes* the compression messages based on its observed channel outputs. Note that in absence of feedback, the transmitter's input cannot be superposed on the receivers' and relays' inputs like the feedback case. This is because at the beginning of each block $b \in [1:B]$, the transmitter can only recover the relays' and receivers' inputs of block $b-1$. To ensure the cooperation between the transmitter and the receiver&relays, in each block b, we let the relays and receivers resends some messages that were sent in block $b-1$, which introduces dependence between the inputs of the transmitter and receivers&relays. It is shown that our non-feedback coding scheme strictly improves the NNC and DDF lower bound for some channels.

This paper is organized as follows. Section II describes the system model: multicast networks with and without feedback. Section III gives our main results and Section IV presents three examples comparing our lower bounds with known lower bounds. Section V contains the proofs of Theorems 1, 2 and 3. Finally, Sections VI gives the proof of Theorem 4.

Notation: We use capital letters to denote random variables and small letters for their realizations, e.g. X and x. For nonnegative integers k, j, let $X_k^j := (X_k, \ldots, X_j)$ and $x_k^j := (x_{k,1}, \ldots, x_{k,j})$.

For a set of integers $\mathcal{A} \subseteq [1:N]$, we denote by $|\mathcal{A}|$ its cardinality and its complement by $\mathcal{A}^c := [1:N] \backslash \mathcal{A}$. A tuple of random variables is denoted as $X(\mathcal{A}) := [X_k : k \in \mathcal{A}]$.

Given a distribution P_A over some alphabet $\mathcal{A}$, a positive real number $\epsilon > 0$, and a positive integer n, $\mathcal{T}_{\epsilon}^{(n)}(P_A)$ is the typical set in [20]. Given a positive integer n, let $\mathbf{1}_{[n]}$ denote the all-one tuple of length n, e.g. $\mathbf{1}_{[3]} = (1,1,1)$. Define a function $\mathcal{C}(x) := \frac{1}{2}\log_2(1+x)$.

II. SYSTEM MODEL

A. Discrete memoryless multicast networks

Consider an N-node DM-MN, see Fig. 1. Let Node 1 be the transmitter, and $\mathcal{R}$ and $\mathcal{D}$ denotes the set of relays and receivers, respectively, where $\mathcal{R} \subset [2:N]$ and $\mathcal{D} = [2:N]\backslash\mathcal{R}$. This setup is characterized by $2N$ finite alphabets $\mathcal{X}_1, \ldots, \mathcal{X}_N, \mathcal{Y}_1, \ldots, \mathcal{Y}_N$ and a channel law $P_{Y_1 \cdots Y_N|X_1,\ldots,X_N}(y_1, \ldots, y_N|x_1, \ldots, x_N)$, where input $x_j \in \mathcal{X}_j$ and output $y_j \in \mathcal{Y}_j$, for $j \in [1:N]$. At discrete-time $i \in [1:n]$, Node $j \in [1:N]$ sends input $x_{j,i} \in \mathcal{X}_j$ and observes $y_{j,i} \in \mathcal{Y}_j$, where n denotes the total blocklength used in the transmission.

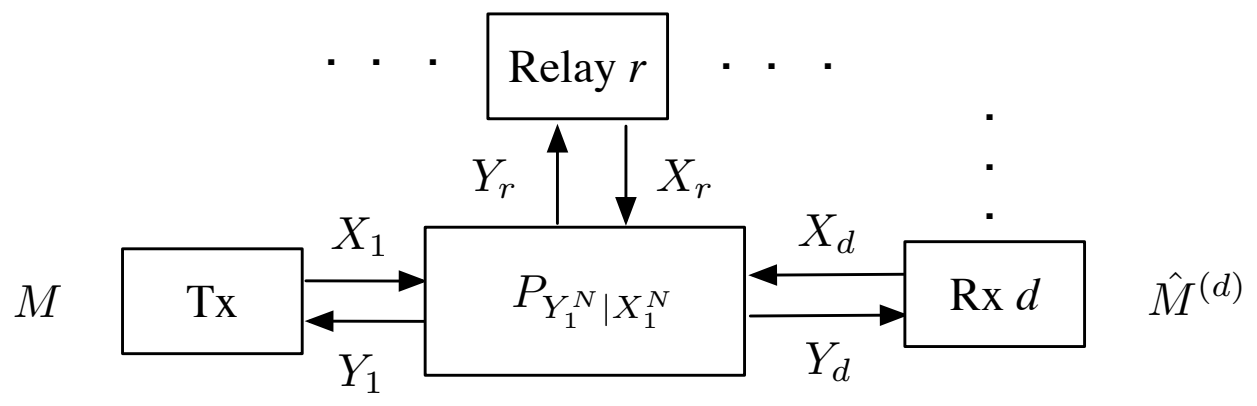

Fig. 1. N-node discrete memoryless multicast network

The transmitter communicates a message $m \in [1:2^{nR}]$ to the set of receivers $\mathcal{D}$ with the assistance of relays $\mathcal{R}$. A $(2^{nR}, n)$ code for this channel has

- a message set $[1:2^{nR}]$,
- a source encoder that maps (M, Y_1^{i-1}) to the channel input $X_{1,i}(M, Y_1^{i-1})$, for each time $i \in [1:n]$,
- relay and receiver encoders that maps Y_k^{i-1} to a sequence $X_{k,i}(Y_k^{i-1})$, for each $k \in [2:N]$ and $i \in [1:n]$,
- decoders that estimates $\hat{M}^{(d)}$ based on Y_d^n, for $d \in \mathcal{D}$.

Suppose m is uniformly distributed over the message set. A rate R is called achievable if for every blocklength n, there exists a $(2^{nR}, n)$ code such that the average probability of error

$$P_e^{(n)} = \Pr[\hat{M}^{(d)} \neq M, \text{ for some } d \in \mathcal{D}]$$

tends to 0 as the n tends to infinity. The capacity C_{NoFb} is the supremum of the set of achievable rates R such that $\lim_{n\to\infty} P_e^{(n)} = 0$.

B. Discrete memoryless multicast networks with feedback

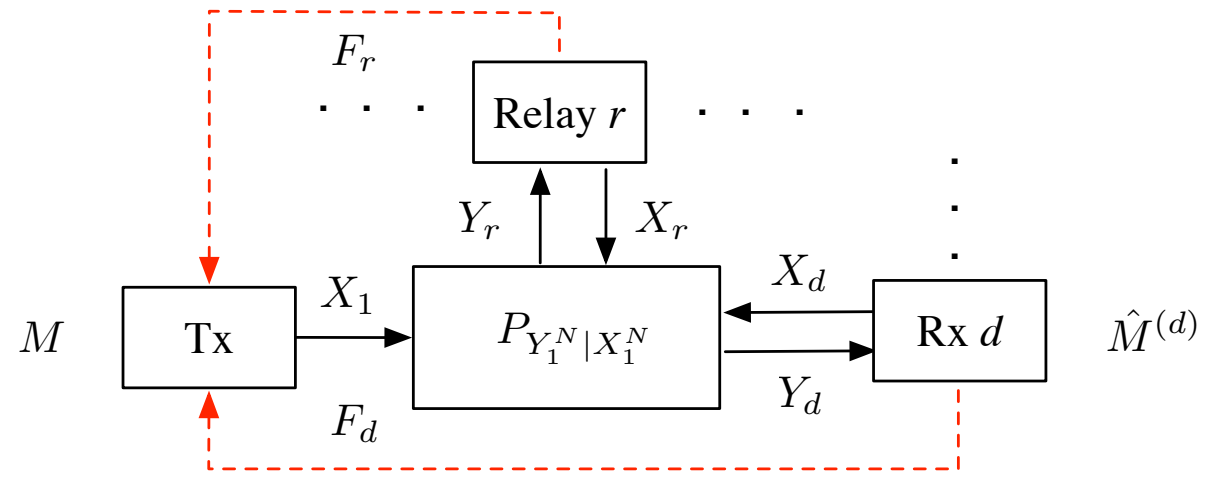

Fig. 2. N-node discrete memoryless multicast network with feedback

Consider an N-node DM-MN *with feedback*, see Fig. 2. This model can be modified from the model without feedback in Section II-A if in the later setup $Y_{1,i}$ represents the feedback signals sent by the receivers and relays, i.e., $Y_{1,i} = (F_{2,i}, \dots, F_{N,i})$, where $F_{k,i} \in \mathcal{F}_{k,i}$ is the feedback signal sent by Node $k \in [2 : N]$, and $\mathcal{F}_{k,i}$ denotes feedback finite alphabets.

More specifically, after observing $Y_{k,i}$, each Node $k \in [2 : N]$ produces the *channel input* $X_{k,i}$ and *feedback signal* $F_{k,i}$ based on $(Y_{k,1}, \dots, Y_{k,i-1})$, then it broadcasts $X_{k,i}$ into the network and sends $F_{k,i}$ to the transmitter through a feedback pipe. Let C_{Fb} denote the capacity in the presence of feedback.

Suppose the feedback pipe between the transmitter and Node k is instant, noiseless and *rate-limited* to $R_{\text{Fb},k}$ bits per channel use, then

$$|\mathcal{F}_{k,1}| \times \cdots \times |\mathcal{F}_{k,n}| \leq 2^{nR_{\text{Fb},k}}, \quad k \in [2 : N]. \tag{1}$$

When $R_{\text{Fb,k}} \geq \log_2 |\mathcal{Y}_k|$, the network is equivalent to perfect-feedback setup where after each channel use the receivers and relays send their channel outputs back to the transmitter, i.e., $Y_1 = (Y_2, \dots, Y_N)$.

III. PREVIOUS LOWER BOUNDS AND MOTIVATIONS

We recall some previous lower bounds on the capacity of DM-MN and present interesting observations that inspire our work.

A. NNC and DDF lower bounds

The NNC was proposed by Lim *et al.* [8], where each Node $k \in [1 : N]$ compresses its received signal Y_k to $\hat{Y}_k$ and broadcast the compression message into the network. For DM-MN, the NNC leads to the lower bound which satisfies

$$\begin{aligned} R \leq\, & I(X(\mathcal{S}); \hat{Y}(\mathcal{S}^c), Y_d | X(\mathcal{S}^c)) \\ & - I(\hat{Y}(\mathcal{S}); Y(\mathcal{S}) | X_1^N, Y_d, \hat{Y}(\mathcal{S}^c)) \end{aligned} \tag{2a}$$

for all $d \in \mathcal{D}$, $\mathcal{S} \subset [1 : N]$ with $\mathcal{S} \cap \{1\} \neq \emptyset$, $\mathcal{S}^c \cap \mathcal{D} \neq \emptyset$ and for some pmf

$$\left[\prod_{k=1}^{N} P_{X_k} P_{\hat{Y}_k | X_k Y_k}\right] P_{Y_1^N | X_1^N}. \tag{2b}$$

The DDF was proposed by Lim *et al.* [10], where the transmitter uses *backward* encoding to generate auxiliary indices that control the transmission over the entire network. For DM multicast network, the DDF lower bound satisfies

$$\begin{aligned} R \leq\, & I(X(\mathcal{S}); U(\mathcal{S}^c), Y_d | X(\mathcal{S}^c)) \\ & - \sum_{k \in \mathcal{S}^c} I(U_k; U(\mathcal{S}_k^c), X^N | X_k, Y_k) \end{aligned} \tag{3}$$

for all $d \in \mathcal{D}$, $\mathcal{S} \subset [1 : N]$ with $\mathcal{S} \cap \{1\} \neq \emptyset$, $\mathcal{S}^c \cap \mathcal{D} \neq \emptyset$ and for some pmf $\left[\prod_{k=2}^{N} P_{X_k}\right] P_{X_1 | X_2^N} P_{Y_1^N | X_1^N} P_{U_2^N | X_1^N}$, where $\mathcal{S}_k^c = \mathcal{S}^c \cap [1 : k-1]$ for $k \in [1 : N]$.

B. Motivation

Given the NNC lower bound (2), rewrite the right term of (2a):

$$\begin{aligned} & I(X(\mathcal{S}); \hat{Y}(\mathcal{S}^c), Y_d | X(\mathcal{S}^c)) - I(\hat{Y}(\mathcal{S}); Y(\mathcal{S}) | X_1^N, Y_d, \hat{Y}(\mathcal{S}^c)) \\ & = I(X_1, X(\mathcal{T}); \hat{Y}(\mathcal{T}^c), Y_d | X(\mathcal{T}^c)) \\ & \quad - I(\hat{Y}_1, \hat{Y}(\mathcal{T}); Y_1, Y(\mathcal{T}) | X_1^N, Y_d, \hat{Y}(\mathcal{T}^c)) \\ & \overset{(a)}{=} I(X_1, X(\mathcal{T}); \hat{Y}(\mathcal{T}^c), Y_d | X(\mathcal{T}^c)) - I(\hat{Y}_1; Y_1 | X_1^N, Y_d, \hat{Y}_2^N) \\ & \quad - I(\hat{Y}(\mathcal{T}); Y(\mathcal{T}) | X_1^N, Y_d, \hat{Y}(\mathcal{T}^c)) \\ & \overset{(b)}{\leq} I(X_1, X(\mathcal{T}); \hat{Y}(\mathcal{T}^c), Y_d | X(\mathcal{T}^c)) \\ & \quad - I(\hat{Y}(\mathcal{T}); Y(\mathcal{T}) | X_1^N, Y_d, \hat{Y}(\mathcal{T}^c)) \end{aligned} \tag{4}$$

where $\mathcal{T} = \mathcal{S}\backslash\{1\}$ and $\mathcal{T}^c$ is the complement of $\mathcal{T}$ in $[2:N]$. The equality (a) holds because $\big(X([1:N]\backslash\{k\}), \hat{Y}([1:N]\backslash\{k\})\big) - (X_k, Y_k) - \hat{Y}_k$ forms Markov chain in view of pmf (2b), for all $k \in [1:N]$.

From the inequality (b) in (4), it's easy to check that the optimal choice of $\hat{Y}_1$ is $\hat{Y}_1 = \emptyset$, which makes NNC lower bound equivalent to

$$\begin{aligned} R \leq\, & I(X_1, X(\mathcal{T}); \hat{Y}(\mathcal{T}^c), Y_d | X(\mathcal{T}^c)) \\ & - I(\hat{Y}(\mathcal{T}); Y(\mathcal{T}) | X_1^N, Y_d, \hat{Y}(\mathcal{T}^c)) \end{aligned} \tag{5}$$

for all $d \in \mathcal{D}$, $\mathcal{T} \subset [2:N]$ with $\mathcal{T}^c \cap \mathcal{D} \neq \emptyset$ and for some pmf $\left[\prod_{k=1}^N P_{X_k}\right] P_{Y_1^N|X_1^N} \left[\prod_{k=2}^N P_{\hat{Y}_k|X_kY_k}\right]$. Recall that in NNC the auxiliary random variable $\hat{Y}_1$ represents the compression of Y_1 at the transmitter. Setting $\hat{Y}_1 = \emptyset$ means that the transmitter doesn't compress Y_1, and simply ignores it.

Now consider the DDF scheme. Due to the backward encoding at the transmitter, the transmitter has to perform encoding offline before receiving Y_1, which makes it impossible to ultilize Y_1.

To summarize, both NNC and DDF fail to use the transmitter's observation Y_1 (In NNC scheme, although the transmitter can process Y_1, the optimal choice is not to use it.). In fact, Y_1 is potentially useful to improve the achievable rate and thus should not be simply ignored. In this paper, we propose new block-Markov coding schemes which improve the NNC and DDF lower bounds by using Y_1 and hybrid relaying strategies. The key idea is as follows:

- Each Node $k \in [2:N]$ compresses its channel output Y_k to $\hat{Y}_k$, and decodes (part of) the source message. Then it sends the channel input consisting of the compression message and the decoded source message.
- The transmitter obtains or decodes[1] the compression messages generated by all the receivers and relays, based on Y_1, and then forwards them together with the source message.
- Each Receiver k decodes all compression messages except the one it generated itself, and then reconstructs $(\hat{Y}_2, \ldots, \hat{Y}_N)$. Finally it uses $(Y_k, \hat{Y}_2, \ldots, \hat{Y}_N)$ as enhanced outputs to decode the source message.

IV. MAIN RESULTS

This section presents our main results. The proofs are given in Sections VI and VII.

A. DM-MN with rate-limited feedback

Theorem 1. *For DM-MN with feedback from the receivers and relays to the transmitter, any rate $R > 0$ is achievable if it satisfies*

$$\begin{aligned} R \leq\, & I(X_1, X(\mathcal{T}); \hat{Y}(\mathcal{T}^c), Y_d | X(\mathcal{T}^c)) \\ & - I(\hat{Y}(\mathcal{T}); Y(\mathcal{T}) | X_1^N, Y_d, \hat{Y}(\mathcal{T}^c)) \end{aligned} \tag{6}$$

for all $d \in \mathcal{D}$ and $\mathcal{T} \subset [2:N]$ with $\mathcal{T}^c \cap \mathcal{D} \neq \emptyset$, and for some pmf

$$\left[\prod_{k=2}^N P_{X_k}\right] \left[\prod_{k=2}^N P_{\hat{Y}_k|X_kY_k}\right] P_{X_1|X_2^N} P_{Y_1^N|X_1^N} \tag{7}$$

such that

$$R_{\text{Fb},k} \geq I(\hat{Y}_k; Y_k | X_k), \quad \textit{for } k \in [2:N], \tag{8}$$

where $\mathcal{T}^c$ is the complement of $\mathcal{T}$ in $[2:N]$.

---

[1] When Y_1 represents the feedback signals sent by the receivers and relays, the transmitter directly obtains compression messages through feedback pipes; when Y_1 represents the channel output instead of feedback signals, the transmitter decodes the compression message based on Y_1 with side information X_1.

Proof: See Section VI-A. ■

Remark 1. *Comparing the lower bound in Theorem 1 with the NNC lower bound* (5)*, our rate stirctly includes NNC if the feedback rates are sufficient large, i.e., if* (8) *holds for all pmfs* (7)*. This is because in* (7) *we allow the joint input distribution of form* $\prod_{k=2}^{N} P_{X_k} P_{X_1|X_2^N}$ *instead of* $\prod_{k=1}^{N} P_{X_k}$*, which attains cooperation between the transmitter and the relays&receivers.*

In the scheme for Theorem 1, the relays and receivers both perform compress-forward. In fact, the relays can apply a hybrid strategy that combines compress-forward and partial decode-forward, which leads to a larger achievable rate below.

Theorem 2. *For DM-MN with feedback from the receivers and relays to the transmitter,any rate* $R > 0$ *is achievable if it satisfies*

$$\begin{aligned} R \leq\ & I(X_1, X(\mathcal{T}), U(\mathcal{T}); \hat{Y}(\mathcal{T}^c), Y_d | X(\mathcal{T}^c), U(\mathcal{T}^c)) \\ & - I(\hat{Y}(\mathcal{T}); Y(\mathcal{T}) | U_2^N, X_1^N, \hat{Y}(\mathcal{T}^c), Y_d) \\ & + \min_{r \in \mathcal{R}} I(U_r; Y_r | X_r) \end{aligned} \tag{9a}$$

$$\begin{aligned} R \leq\ & I(X_1, X(\mathcal{T} \cup \mathcal{R}), U(\mathcal{R}); \hat{Y}(\mathcal{T}^c \cap \mathcal{D}), Y_d | X(\mathcal{T}^c \cap \mathcal{D})) \\ & - I(\hat{Y}(\mathcal{T} \cup \mathcal{R}); Y(\mathcal{T} \cup \mathcal{R}) | U_2^N, X_1^N, \hat{Y}(\mathcal{T}^c \cap \mathcal{D}), Y_d) \end{aligned} \tag{9b}$$

for all $d \in \mathcal{D}$ *and* $\mathcal{T} \subset [2:N]$ *with* $\mathcal{T}^c \cap \mathcal{D} \neq \emptyset$*, and for some pmf*

$$\begin{aligned} & \left[\prod_{r \in \mathcal{R}} P_{X_r U_r} P_{\hat{Y}_r | U_r X_r Y_r} \right] \left[\prod_{d \in \mathcal{D}} P_{X_d} P_{\hat{Y}_d | X_d Y_d} \right] \\ & \times P_{X_1 | X_2^N U(\mathcal{R})} P_{Y_1^N | X_1^N} \end{aligned} \tag{10}$$

such that

$$R_{\text{Fb},r} \geq I(\hat{Y}_r; Y_r | X_r, U_r), \quad \text{for } r \in \mathcal{R} \tag{11a}$$

$$R_{\text{Fb},d} \geq I(\hat{Y}_d; Y_d | X_d), \quad \text{for } d \in \mathcal{D}. \tag{11b}$$

where $U_d = \emptyset$ *for all* $d \in \mathcal{D}$ *and* $\mathcal{T}^c$ *is the complement of* $\mathcal{T}$ *in* $[2:N]$.

Proof: See Section VI-C. ■

Remark 2. *By setting* $U_r = \emptyset$*, for all* $r \in \mathcal{R}$*, the achievable rate in Theorem 2 specializes to the lower bound in Theorem 1. Note that setting* $U_r = \emptyset$ *for all* $r \in \mathcal{R}$ *means that all relay nodes perform only compress-forward strategy without partially decode-forwarding the source message.*

In the scheme for Theorem 2, all relays decode the same part of the source message, which may lead to relatively poor rate performance when some relay's observed signal is bad. One improvement could be made by allowing different relays to decode different parts of the source message according to the strength of their received signals. By doing this way, we obtain the following achievable rate.

Theorem 3. *For DM-MN with feedback from the receivers and relays to the transmitter, any rate* $R > 0$

is achievable if it satisfies

$$
\begin{aligned}
R \leq\ & (X_1, X(\mathcal{T}), U(\mathcal{T}); \hat{Y}(\mathcal{T}^c), Y_d | V_0, U_0, X(\mathcal{T}^c), U(\mathcal{T}^c)) \\
& + \sum_{r \in \mathcal{T}^c \cap \mathcal{R}} I(U_r; Y_r | U_0, V_0, X_r) + \min_{r \in \mathcal{R}} I(U_0; Y_r | V_0, X_r) \\
& - I(\hat{Y}(\mathcal{T}); Y(\mathcal{T}) | V_0, U_0, U_2^N, X_1^N, \hat{Y}(\mathcal{T}^c), Y_d) \qquad (12a) \\
R \leq\ & I(V_0, U_0, X_1, X(\mathcal{T} \cup \mathcal{R}), U(\mathcal{R}); \hat{Y}(\mathcal{T}^c \cap \mathcal{D}), Y_d | \\
& \qquad X(\mathcal{T}^c \cap \mathcal{D})) \\
& - I(\hat{Y}(\mathcal{T} \cup \mathcal{R}); Y(\mathcal{T} \cup \mathcal{R}) | V_0, U_0, U_2^N, \\
& \qquad X_1^N, \hat{Y}(\mathcal{T}^c \cap \mathcal{D}), Y_d) \qquad (12b)
\end{aligned}
$$

for all $d \in \mathcal{D}$ and $\mathcal{T} \subset [2 : N]$ with $\mathcal{T}^c \cap \mathcal{D} \neq \emptyset$, and for some pmf

$$
\begin{aligned}
& P_{V_0} P_{U_0|V_0} \left[\prod_{r \in \mathcal{R}} P_{X_r|V_0} P_{U_r|V_0 U_0 X_r} P_{\hat{Y}_r|V_0 U_0 U_r X_r Y_r} \right] \\
& \times \left[\prod_{d \in \mathcal{D}} P_{X_d} P_{\hat{Y}_d|X_d Y_d} \right] P_{X_1|V_0 U_0 X_2^N U(\mathcal{R})} P_{Y_1^N|X_1^N} \qquad (13)
\end{aligned}
$$

such that

$$R_{\text{Fb},r} \geq I(\hat{Y}_r; Y_r | V_0, U_0, X_r, U_r), \quad \textit{for } r \in \mathcal{R} \qquad (14a)$$

$$R_{\text{Fb},d} \geq I(\hat{Y}_d; Y_d | X_d), \quad \textit{for } d \in \mathcal{D} \qquad (14b)$$

where $U_d = \emptyset$ for all $d \in \mathcal{D}$ and $\mathcal{T}^c$ is the complement of $\mathcal{T}$ in $[2 : N]$.

Proof: See Section VI-C. ■

Remark 3. *By letting $V_0 = U_0 = \emptyset$, we find that the constraint* (12a) *is less stringent than* (9a)*;* (12b)*,* (13) *and* (14) *reduce to* (9b)*,* (10) *and* (11)*, respectively. Thus the rate in Theorem 3 includes the rate in Theorem 2.*

B. DM-MN without feedback

Remark 4. *The lower bounds present above can be directly extended to DM-MN* without *feedback by letting feedback rate $R_{\text{Fb},k} = 0$, and $\hat{Y}_k = \emptyset$ for all $k \in [2 : N]$.*

In this subsection, we propose a new lower bound for DM-MN without feedback that makes use of the channel outputs (not feedback signals) observed at the transmitter. The key idea is that the transmitter, instead of obtaining compression messages through feedback, *decodes* them based on its observed channel outputs. The new achievable rate is shown below.

Theorem 4. *For DM-MN without feedback, any rate $R > 0$ is achievable if it satisfies*

$$
\begin{aligned}
R \leq\ & I(X_1, X(\mathcal{T}), U(\mathcal{T}), V(\mathcal{T}); \hat{Y}(\mathcal{T}^c), Y_d | \\
& \qquad U(\mathcal{T}^c), V(\mathcal{T}^c), X(\mathcal{T}^c)) \\
& - I(\hat{Y}(\mathcal{T}); Y(\mathcal{T}) | U_2^N, V_2^N, X_1^N, \hat{Y}(\mathcal{T}^c), Y_d) \\
& + \min_{r \in \mathcal{R}} I(U_r; \hat{Y}_r | X_r, V_r) \qquad (15a) \\
R <\ & I(X_1, V(\mathcal{T} \cup \mathcal{R}), U(\mathcal{R}), X(\mathcal{T} \cup \mathcal{R}); \hat{Y}(\mathcal{T}^c \cap \mathcal{D}), Y_d | \\
& \qquad V(\mathcal{T}^c), X(\mathcal{T}^c \cap \mathcal{D})) \\
& - I(\hat{Y}(\mathcal{T} \cup \mathcal{R}); Y(\mathcal{T} \cup \mathcal{R}) | V_2^N, X_1^N, U_2^N, \hat{Y}(\mathcal{T}^c \cap \mathcal{D}), Y_d) \\
& \qquad (15b)
\end{aligned}
$$

for all $d \in \mathcal{D}$ *and* $\mathcal{T} \subset [2:N]$ *with* $\mathcal{T}^c \cap \mathcal{D} \neq \emptyset$*, and for some pmf*

$$\left[\prod_{k=2}^{N} P_{V_k} P_{X_k|V_k} P_{U_k|V_k}\right] \left[\prod_{r\in\mathcal{R}} P_{\hat{Y}_r|U_rV_rX_rY_r}\right] \times \left[\prod_{d\in\mathcal{D}} P_{\hat{Y}_d|V_dX_dY_d}\right] P_{X_1|V_2^N U(\mathcal{R})} P_{Y_1^N|X_1^N} \tag{16}$$

such that

$$\sum_{r\in\mathcal{T}\cap\mathcal{R}} I(\hat{Y}_r;Y_r|U_r,V_r,X_r) + \sum_{d\in\mathcal{T}\cap\mathcal{D}} I(\hat{Y}_d;Y_d|V_d,X_d) \leq I(X(\mathcal{T});Y_1|U_2^N,V_2^N,X(\mathcal{T}^c),X_1) \tag{17}$$

where $U_d = \emptyset$*, for all* $d \in \mathcal{D}$*, and* $\mathcal{T}^c$ *is the complement of* $\mathcal{T}$ *in* $[2:N]$*.*

Proof: See Section VII. ■

Remark 5. *The scheme for Theorem 4 requires the transmitter to decode the compression messages generated by all receivers and relays, which may limit the performance if there are weak links from the receivers or relays to the transmitter. One proper way to improve the scheme is to allow the transmitter to adaptively decode a set of (not all) nodes' compression messages.*

Suppose the transmitter decodes only the compression messages generated by the set of nodes $\mathcal{A} \subseteq [2:N]$*. Then by a scheme similar to that for Theorem 4, we obtain a new lower bound having same rate espression as* (15)*, but is maximized over all set* $\mathcal{A} \subseteq [2:N]$ *for all* $d \in \mathcal{D}$*,* $\mathcal{T} \subset [2:N]$ *with* $\mathcal{T}^c \cap \mathcal{D} \neq \emptyset$*, and for some pmf*

$$\left[\prod_{k=2}^{N} P_{V_k} P_{X_k|V_k} P_{U_k|V_k}\right] \left[\prod_{r\in\mathcal{R}} P_{\hat{Y}_r|U_rV_rX_rY_r}\right] \times \left[\prod_{d\in\mathcal{D}} P_{\hat{Y}_d|V_dX_dY_d}\right] P_{Y_1^N|X_1^N} P_{X_1|V(\mathcal{A})U(\mathcal{A})} \tag{18}$$

such that

$$\sum_{r\in\mathcal{T}_\mathcal{A}\cap\mathcal{R}} I(\hat{Y}_r;Y_r|U_r,V_r,X_r) + \sum_{d\in\mathcal{T}_\mathcal{A}\cap\mathcal{D}} I(\hat{Y}_d;Y_d|V_d,X_d) \leq I(X(\mathcal{T}_\mathcal{A});Y_1|U(\mathcal{A}),V(\mathcal{A}),X(\mathcal{T}_\mathcal{A}^c),X_1) \tag{19}$$

where $U_d = \emptyset$ *for all* $d \in \mathcal{D}$*,* $\mathcal{T}^c$ *is the complement of* $\mathcal{T}$ *in* $[2:N]$*,* $\mathcal{T}_\mathcal{A} = \mathcal{T} \cap \mathcal{A}$*, and* $\mathcal{T}_\mathcal{A}^c$ *is the complement of* $\mathcal{T}_\mathcal{A}$ *in* $\mathcal{A}$*.*

This lower bound reduces to the lower bound in Theorem 4 when $\mathcal{A} = [2:N]$*, and to the NNC lower bound when* $\mathcal{A} = \emptyset$ *and* $V_k = U_k = \emptyset$*, for all* $k \in [2:N]$*.*

V. EXAMPLES

A. The relay channel with relay-transmitter feedback

Consider the relay channel $P_{Y_2Y_3|X_1X_2}(y_2,y_3|x_1,x_2)$ with perfect feedback from the relay to the transmitter, see Fig. 3.

Let $\hat{Y}_3 = \emptyset$, then lower bound in Theorem 1 specializes to

$$R \leq I(X_1;\hat{Y}_2,Y_3|X_2) \tag{20a}$$

$$R \leq I(X_1,X_2;Y_3) - I(\hat{Y}_2;Y_2|X_1,X_2,Y_3) \tag{20b}$$

for some pmf $P_{X_1X_2}P_{\hat{Y}_2|X_2Y_2}$.

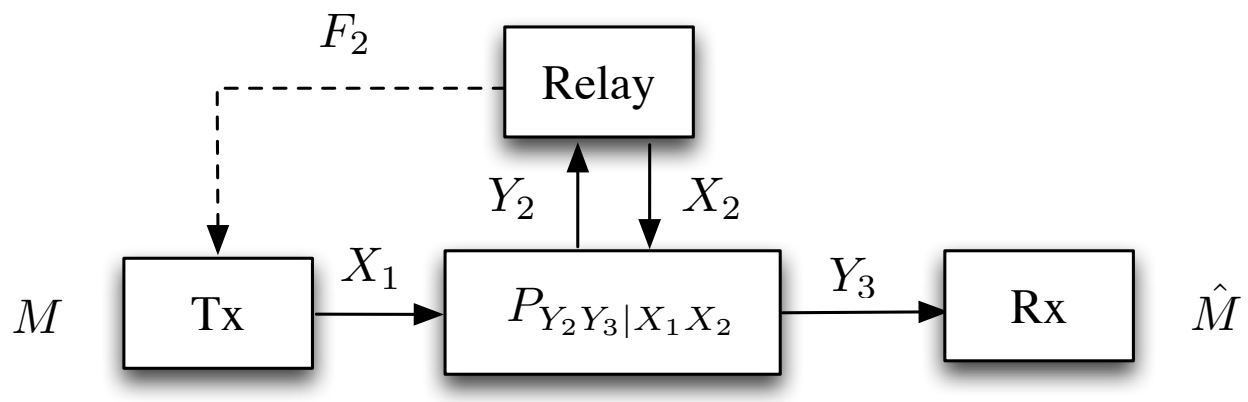

Fig. 3. Relay channel with relay-transmitter feedback

Let $U_3 = \hat{Y}_3 = \emptyset$, then Theorem 2 specializes to

$$R \leq I(X_1; \hat{Y}_2, Y_3|U_2, X_2) + I(U_2; Y_2|X_2) \tag{21a}$$

$$R \leq I(X_1, X_2; Y_3) - I(\hat{Y}_2; Y_2|U_2, X_1, X_2, Y_3) \tag{21b}$$

for some pmf $P_{X_1X_2U_2}P_{\hat{Y}_2|X_2U_2Y_2}$.

In [17] Gabbai and Bross studied this channel and proposed coding schemes based on restricted decoding and deterministic partitioning. The rates (20) and (21) recover Gabbai and Bross's rates of Theorems 2 and 3 in [17], respectively.

By using NNC [8], the rate R satisfying

$$R \leq I(X_1; \hat{Y}_2, Y_3|X_2) \tag{22a}$$

$$R \leq I(X_1, X_2; Y_3) - I(\hat{Y}_2; Y_2|X_1, X_2, Y_3) \tag{22b}$$

is achievable for any pmf $P_{X_1}P_{X_2}P_{\hat{Y}_2|X_2Y_2}$, which coincides with the compress-forward lower bound [2, Theorem 6].

By using DDF [10], [11], the rate R satisfying

$$R \leq I(X_1, X_2; Y_3) \tag{23a}$$

$$R \leq I(U_2; Y_2|X_2) + I(X_1; Y_3|X_2, U_2) \tag{23b}$$

is achievable for any pmf $P_{X_1X_2U_2}$, which coincides with the partial decode-forward lower bound [2, Theorem 7].

The lower bound (20) includes (22) because it allows a joint input distribution $P_{X_1X_2}$ rather than $P_{X_1}P_{X_2}$. The lower bound (21) includes (22) and (23), which can be seen by letting $U_2 = \emptyset$ and $\hat{Y}_2 = \emptyset$, respectively. In [17] Gabbai and Bross showed that for the Gaussian and Z relay channels, the lower bound (21) strictly improves on the known lower bounds on the achievable rate in the absence of feedback, including the compress-forward lower bound in (22), and the partial decode-forward lower bound in (23). In view of this fact, we have the following corollary:

Corollary 1. *For the DM single-relay channel with relay-transmitter feedback, our coding scheme recovers Gabbai and Bross's results, and can strictly improve on NNC [8], DDF [10] and all known lower bounds on the achievable rate in the absence of feedback.*

B. Enhanced Gaussian relay channel

Consider an enhanced Gaussian relay channel where the transmitter can access the output Y_1, see Fig. 4. The channel outputs are:

$$Y_1 = g_{21}X_2 + Z_1,$$
$$Y_2 = g_{12}X_1 + Z_2,$$
$$Y_3 = g_{13}X_1 + g_{23}X_2 + Z_3$$

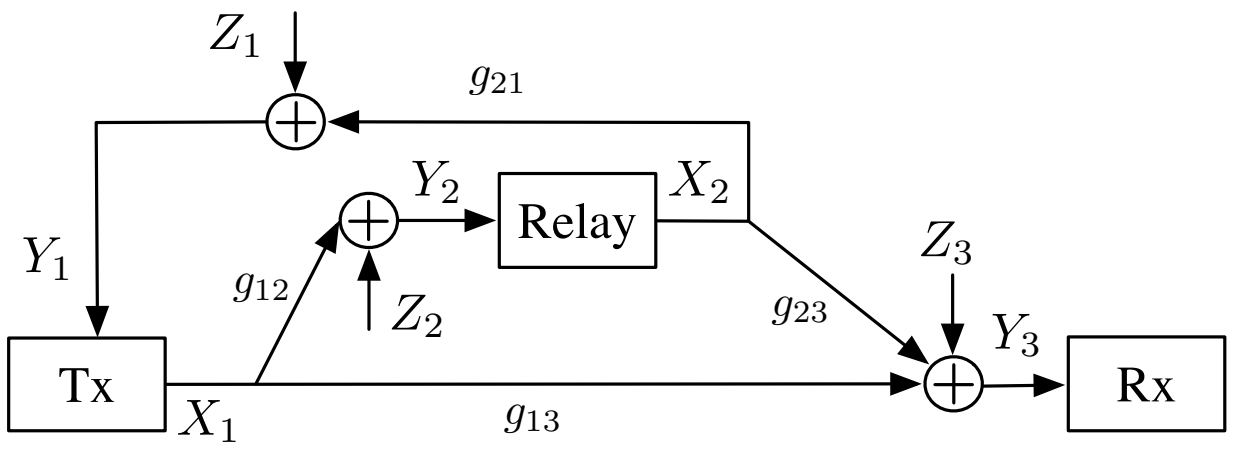

Fig. 4. The enhanced Gaussian relay channel

where g_{21}, g_{23}, g_{12} and g_{13} are channel gains and $Z_1 \sim \mathcal{N}(0,1)$, $Z_2 \sim \mathcal{N}(0,1)$ and $Z_3 \sim \mathcal{N}(0,1)$ are independent Gaussian noise variables. The input power constraints are $\mathbb{E}|X_1^2| \leq P_1$ and $\mathbb{E}|X_2^2| \leq P_2$. Let $s_{12} = g_{12}^2 P_1$, $s_{13} = g_{13}^2 P_1$, $s_{23} = g_{23}^2 P_2$ and $s_{21} = g_{21}^2 P_2$.

We compare the lower bound in Theorem 4 with the cut-set outer bound and the previous known lower bounds, such as amplify-forward, NNC, DDF and Cover-El Gama's general lower bound [2, Theorem 7]. *Achievable rate in Theorem 4:* Let $U_3 = V_3 = \hat{Y}_3 = \emptyset$, then Theorem 4 reduces to

$$R \leq I(X_1;\hat{Y}_2,Y_3|U_2,V_2,X_2) + I(U_2;Y_2|V_2,X_2) \tag{24a}$$
$$R \leq I(X_1,X_2;Y_3) - I(\hat{Y}_2;Y_2|U_2,V_2,X_1,X_2,Y_3) \tag{24b}$$

for some pmf $P_{V_2}P_{X_2|V_2}P_{U_2|V_2}P_{X_1|V_2U_2}P_{\hat{Y}_2|X_2V_2U_2Y_2}$ such that

$$I(\hat{Y}_2;Y_2|U_2,V_2,X_2) \leq I(X_2;Y_1|U_2,X_1,V_2). \tag{24c}$$

To compute (24), we choose the same distributions as in [21]:

$$\begin{aligned} &U_2 = aV_2 + W_0, X_2 = cV_2 + W_2 \\ &X_1 = bU_2 + W_1, \hat{Y}_2 = Y_2 + Z' \end{aligned} \tag{25}$$

where $V_2 \sim \mathcal{N}(0,P_1), W_0 \sim \mathcal{N}(0,\frac{\bar{\alpha}\beta P_1}{b^2}), W_1 \sim \mathcal{N}(0,\alpha P_1), W_2 \sim \mathcal{N}(0,\gamma P_2)$ and $Z' \sim \mathcal{N}(0,N')$ are independent, for $\alpha,\beta,\gamma \in [0,1]$. For this choice, we have,

$$\begin{aligned} I(X_1;\hat{Y}_2,Y_3|X_2,V_2,U_2) &= \mathcal{C}\Big(\alpha s_{13} + \frac{\alpha s_{12}}{1+N'}\Big) \\ I(U_2;Y_2|V_2,X_2) &= \mathcal{C}\Big(\frac{s_{12}\beta\bar{\alpha}}{\alpha s_{12}+1}\Big) \\ I(X_1,X_2;Y_3) &= \mathcal{C}\Big(2\sqrt{\bar{\alpha}\bar{\beta}\bar{\gamma}s_{13}s_{23}}+s_{13}+s_{23}\Big) \\ I(\hat{Y}_2;Y_2|U_2,V_2,X_1,X_2,Y_3) &= \mathcal{C}\Big(\frac{1}{N'}\Big), \end{aligned} \tag{26}$$

and

$$\begin{aligned} I(\hat{Y}_2;Y_2|U_2,V_2,X_2) &= \mathcal{C}\Big(\frac{1+\alpha s_{12}}{N'}\Big) \\ I(X_2;Y_1|U_2,X_1,V_2) &= \mathcal{C}(\gamma s_{21}). \end{aligned} \tag{27}$$

Thus we obtain the lower bound

$$\begin{aligned} R \leq &\min\Big\{\mathcal{C}\Big(\alpha s_{13} + \frac{\alpha s_{12}}{1+N'}\Big) + \mathcal{C}\Big(\frac{s_{12}\beta\bar{\alpha}}{\alpha s_{12}+1}\Big), \\ &\mathcal{C}\Big(2\sqrt{\bar{\alpha}\bar{\beta}\bar{\gamma}s_{13}s_{23}} + s_{13} + s_{23}\Big) - \mathcal{C}\Big(\frac{1}{N'}\Big)\Big\} \end{aligned} \tag{28}$$

subject to the constraint

$$N' \geq \frac{1+\alpha s_{12}}{\gamma s_{21}}. \tag{29}$$

Amplify-forward: For the general Gaussian relay channel with linear relaying functions, finding the channel capacity is a non-convex optimization problem for blocklength $n \geq 2$, which is almost intractable. The paper [22] proposed an achievable rate:

$$R \leq \max_{0<\alpha\leq 1} \frac{1}{2}\mathcal{C}\Big(2\alpha P\Big(1+\frac{\big(\sqrt{(1-\alpha)/\alpha}+g_{12}g_{23}d\big)^2}{1+g_{23}^2 d^2}\Big)\Big)$$

where $d=\sqrt{2P_2/(2\alpha s_{13}^2+1)}$.

NNC: When using NNC [8], the achievable rate is:

$$\begin{aligned} R &\leq I(X_1;\hat{Y}_2,Y_3|X_2)-I(\hat{Y}_1;Y_1|X_1,X_2,\hat{Y}_2,Y_3),\\ R &\leq I(X_1,X_2;Y_3)-I(\hat{Y}_2;Y_2|X_2,Y_3)-I(\hat{Y}_1;Y_1|X_1,X_2,Y_3)\end{aligned}$$

for some pmf $P_{X_1}P_{X_2}P_{\hat{Y}_2|X_2Y_2}P_{\hat{Y}_1|X_1Y_1}$. It's easy to check that the optimal choice of Y_1 is $\hat{Y}_1=\emptyset$, which leads to the compress-forward lower bound (22). The optimal distribution of $\hat{Y}_2$ is generally unknown. Choose $\hat{Y}_2=Y_2+Z'$ where $Z'\sim\mathcal{N}(0,\sigma^2)$ and optimise over σ^2. We obtain the achievable rate

$$R \leq \mathcal{C}\Big(s_{13}+\frac{s_{12}s_{23}}{s_{13}+s_{12}+s_{23}+1}\Big). \tag{30}$$

DDF: When using DDF [10], the achievable rate is same as the partial decode-forward lower bound (23). For the Gaussian relay channels, partial decode-forward coding doesn't improve the decode-forward lower bound [22], thus we obtain the achievable rate

$$R \leq \min\big\{\mathcal{C}(s_{13}+s_{23}+2\rho\sqrt{s_{13}s_{23}}),\mathcal{C}\big(s_{12}(1-\rho^2)\big)\big\} \tag{31}$$

for $0\leq\rho\leq 1$.

Cover–El Gamal's general lower bound [2, Theorem 7]: In [2] Cover and El Gamal proposed a general lower bound for the relay channel by combining compress-forward and decode-forward, which can be written as:

$$R \leq I(X_1;\hat{Y}_2,Y_3|X_2,U_2)+I(U_2;Y_2|V_2,X_2) \tag{32a}$$

$$R \leq I(X_1,X_2;Y_3)-I(\hat{Y}_2;Y_2|U_2,X_1,X_2,Y_3) \tag{32b}$$

for some pmf $P_{V_2}P_{X_2|V_2}P_{U_2|V_2}P_{X_1|U_2}P_{\hat{Y}_2|X_2U_2Y_2}$ such that

$$I(\hat{Y}_2;Y_2|U_2,X_1,X_2,Y_3)\leq I(X_2;Y_3|V_2). \tag{32c}$$

Choosing the same distributions as in [21], we obtain the lower bound with same expression as (28) but subject to the constraint

$$N' \geq (\alpha(s_{13}+s_{23})+1)\frac{(\beta-\alpha\beta+\alpha)s_{13}+1}{\gamma s_{23}(\alpha s_{13}+1)}. \tag{33}$$

Comparing (29) with (33), if

$$\frac{1+\alpha s_{12}}{s_{21}(\alpha(s_{13}+s_{23})+1)} < \frac{(\beta-\alpha\beta+\alpha)s_{13}+1}{s_{23}(\alpha s_{13}+1)} \tag{34}$$

for all $\alpha,\beta\in[0,1]$ (e.g. $s_{21}>s_{23}, s_{12}<s_{13}$), our coding scheme always improves Cover–El Gama's general lower bound [2, Theorem 7]. This general lower bound includes both the partial decode-forward and compress-forward lower bounds [2], thus we have the following corollary:

Corollary 2. *For the enhanced Gaussian relay channel which satisfies* (34)*, our coding scheme improves the known inner bounds, including the NNC and DDF lower bounds and Cover–El Gama's general lower bound [2, Theorem 7].*

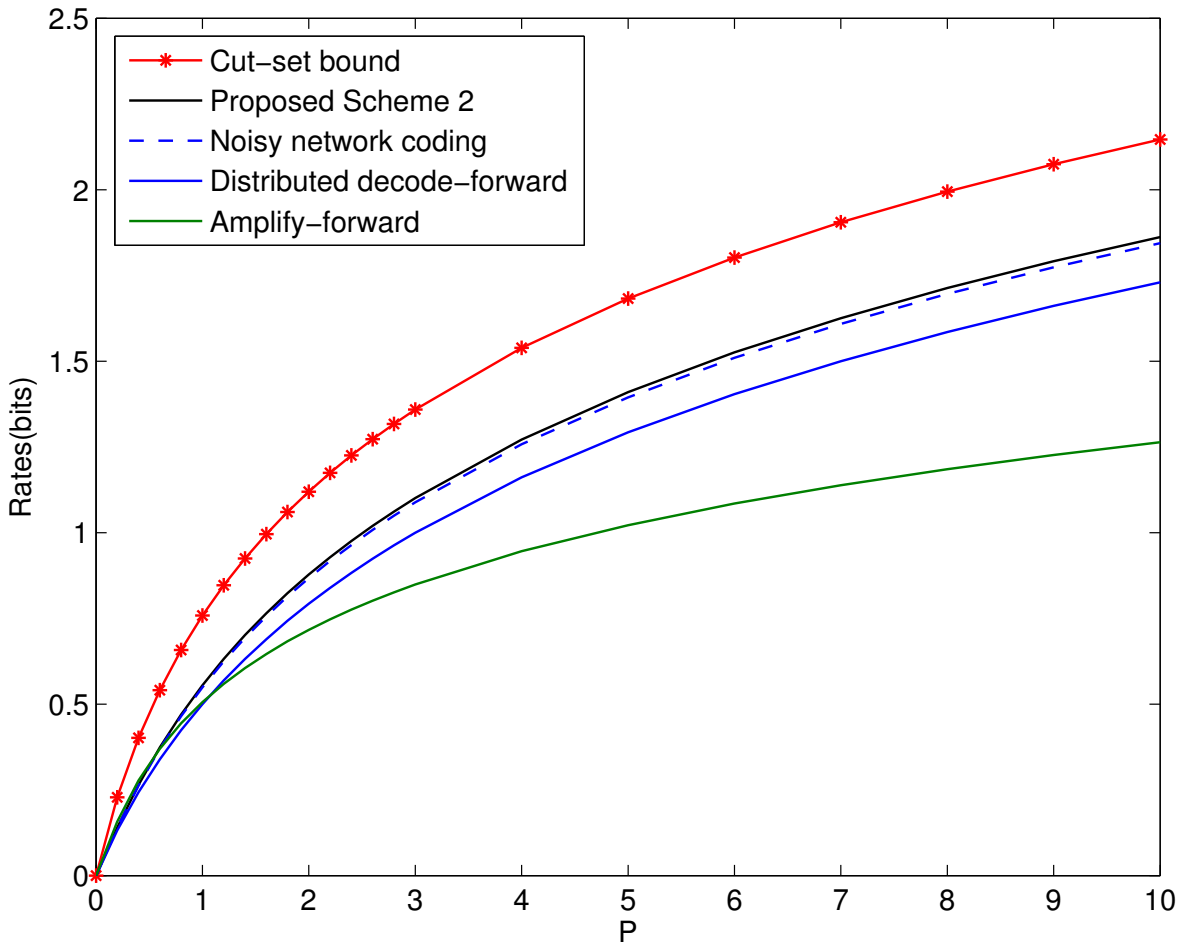

Fig. 5. Achievable rates for the enhanced Gaussian relay channel with $g_{12} = g_{13} = g_{21} = 1$, $g_{23} = 0.7$, and $P_1 = P_2 = P$

TABLE I
ACHIEVABLE RATES FOR THE ENHANCED GAUSSIAN RELAY WITH AND WITHOUT FEEDBACK

d	R_{NNC}	R_{DDF}	R_{CE}	R_{Pro1}	R_{Pro2}
0.73	1.6908	1.6881	1.6927	1.7069	1.6996
0.74	1.6971	1.6703	1.6971	1.7111	1.7032
0.75	1.7033	1.6529	1.7033	1.7153	1.7077
0.76	1.7094	1.6358	1.7094	1.7195	1.7129

Based on (28–33), the achievable rates for $g_{12} = g_{13} = g_{21} = 1$, $g_{23} = 0.7$, and $P_1 = P_2 = P$ are shown in Fig. 5.

Table I compares achievable rates for this enhanced Gaussian relay channel for $g_{12} = 1/d, g_{13} = 1$, $g_{23} = g_{21} = 1/|1-d|$, and with $P_1 = 5, P_2 = 1$. Here R_{NNC}, R_{DDF}, R_{CE}, R_{Pro1} and R_{Pro2} denote rates achieved by NNC, DDF, rates from [2, Theorem 7] and rates from our proposed Theorem 2 and 4, respectively. The feedback scheme (R_{Pro1}) obtains the best performance, and our non-feedback scheme for Theorem 4 (R_{Pro2}) strictly improves the known lower bounds in the absence of feedback.

C. 4-Node Discrete Memoryless Diamond Network

Consider the 4-node DM diamond network $P_{Y_2Y_3|X_1}(y_2, y_3|x_1)P_{Y_4|X_2X_3}(y_4|x_2, x_3)$ [12]. From Theorem 3, we have

Corollary 3. *For 4-node DM diamond network with relay-transmitter feedback, any rate* $R > 0$ *is* *achievable if it satisfies*

$$\begin{aligned}
R \leq\ & I(X_1, X_2, X_3; Y_4) \\
& -I(\hat{Y}_2, \hat{Y}_3; Y_2, Y_3 | V_0, U_0, U_2, U_3, X_1, X_2, X_3, Y_4) && \text{(35a)} \\
R \leq\ & I(X_1, X_2, U_2; \hat{Y}_3, Y_4 | V_0, U_0, X_3, U_3) \\
& +I(U_3; Y_3 | V_0, U_0, X_3) + \min_{r \in \{2,3\}} I(U_0; Y_r | V_0, X_r) \\
& -I(\hat{Y}_2; Y_2 | V_0, U_0, U_2, U_3, X_1, X_2, X_3, \hat{Y}_3, Y_4) && \text{(35b)} \\
R \leq\ & I(X_1, X_2, U_3; \hat{Y}_2, Y_4 | V_0, U_0, X_2, U_2) \\
& +I(U_2; Y_2 | V_0, U_0, X_2) + \min_{r \in \{2,3\}} I(U_0; Y_r | V_0, X_r) \\
& -I(\hat{Y}_3; Y_3 | V_0, U_0, U_2, U_3, X_1, X_2, X_3, \hat{Y}_2, Y_4) && \text{(35c)} \\
R \leq\ & I(X_1, X_2, U_2, U_3; Y_4 | V_0, U_0) + \min_{r \in \{2,3\}} I(U_0; Y_r | V_0, X_r) \\
& -I(\hat{Y}_2, \hat{Y}_3; Y_2, Y_3 | V_0, U_0, U_2, U_3, X_1, X_2, X_3, Y_4) \\
R \leq\ & I(X_1; \hat{Y}_2, \hat{Y}_3, Y_4 | V_0, U_0, X_2, X_3, U_2, U_3) \\
& +I(U_2; Y_2 | U_0, V_0, X_2) + I(U_3; Y_3 | U_0, V_0, X_3) \\
& + \min_{r \in \{2,3\}} I(U_0; Y_r | V_0, X_r) && \text{(35d)}
\end{aligned}$$

for some pmf $P_{U_0V_0}P_{X_1|V_0U_0X_2X_3U_2U_3}\Big[\prod_{r\in\{2,3\}} P_{X_r|V_0}$ $P_{U_r|V_0U_0X_r}P_{\hat{Y}_r|V_0U_0U_rX_rY_r}\Big]$ *such that satisfies* $R_{\text{Fb},r} \geq I(\hat{Y}_r; Y_r | V_0, U_0, X_r, U_r)$*, for* $r \in \{2, 3\}$.

From Remark 1, 2 and 3, we know that the rate (35) strictly includes the NNC lower bound if feedback rate is sufficiently large. Now consider the DDF lower bound for this setup, which is the rate $R > 0$ satisfying

$$\begin{aligned}
R &\leq I(X_1, X_2, X_3; Y_4) && \text{(36a)} \\
R &\leq I(X_1, X_2; Y_4, |X_2, U_2) + I(U_2; Y_2 | X_2) && \text{(36b)} \\
R &\leq I(X_1, X_3; Y_4, |X_3, U_3) + I(U_3; Y_3 | X_3) && \text{(36c)} \\
R &\leq I(X_1; U_2, U_3, Y_4 | X_2, X_3) - I(U_2; X_1, X_3 | X_2, Y_2) \\
&\quad -I(U_3; X_1, X_2, U_2 | X_3, Y_3) && \text{(36d)}
\end{aligned}$$

for some pmf $P_{X_2}P_{X_3}P_{X_1|X_2X_2}P_{U_2U_3|X_1X_2X_3}$ It's not clear in general which of the achievable rate in (35) or (36) is larger.

As mentioned in Remark 4, by letting $R_{\text{Fb},k} = 0$ and $\hat{Y}_k = \emptyset$, for all $k \in [2 : N]$ in Theorem 3, we obtain a new lower bound for the 4-node diamond network *without* feedback. This lower bound in essence is achieved by letting the two relays use partial decode forward to decode different parts of the source message.

Corollary 4. *For 4-node DM diamond network* $P_{Y_2Y_3|X_1}(y_2, y_3|x_1)P_{Y_4|X_2X_3}(y_4|x_2, x_3)$*, any rate* $R > 0$ *is* *achievable if it satisfies*

$$\begin{aligned}
&R \leq I(X_1, X_2, X_3; Y_4) && \text{(37a)}\\
&R \leq \min_{r\in\{2,3\}} I(U_0; Y_r|V_0, X_r) + I(U_2; Y_2|V_0, U_0, X_2) &&\\
&\quad +I(X_1, X_2; Y_4|V_0, U_0, X_2, U_2) && \text{(37b)}\\
&R \leq \min_{r\in\{2,3\}} I(U_0; Y_r|V_0, X_r) + I(U_3; Y_3|V_0, U_0, X_3) &&\\
&\quad +I(X_1, X_2; Y_4|V_0, U_0, X_3, U_3) && \text{(37c)}\\
&R \leq \min_{r\in\{2,3\}} I(U_0; Y_r|V_0, X_r) &&\\
&\quad +I(X_1, X_2, U_2, U_3; Y_4|V_0, U_0) && \text{(37d)}\\
&R \leq \min_{r\in\{2,3\}} I(U_0; Y_r|V_0, X_r) && \text{(37e)}\\
&\quad +I(U_2; Y_2|U_0, V_0, X_2) + I(U_3; Y_3|U_0, V_0, X_3) &&\\
&\quad +I(X_1; \hat{Y}_2, \hat{Y}_3, Y_4|V_0, U_0, X_2, X_3, U_2, U_3) && \text{(37f)}
\end{aligned}$$

for some pmf

$$P_{U_0V_0}P_{X_1|V_0U_0X_2X_3U_2U_3}\left[\prod_{r\in\{2,3\}} P_{X_r|V_0}P_{U_r|V_0U_0X_r}\right].$$

VI. ACHIEVABLE RATES FOR DM MULTIPLE-RELAY CHANNELS WITH PARTIAL FEEDBACK

A. *Scheme 1A*

Define

$$\begin{aligned}
\mathbf{l}_b &:= (l_{2,b}, \ldots, l_{N,b})\\
\hat{\mathbf{l}}_b &:= (\hat{l}_{2,b}, \ldots, \hat{l}_{N,b})
\end{aligned}$$

for $b \in [1 : B+1]$. Let $\mathbf{l}_0 = \mathbf{1}_{[N-1]}$ and $m_{B+1} = 1$.

We present a block-Markov coding scheme where a sequence of B i.i.d message $m_b \in [1 : 2^{nR}]$, $b \in [1 : B]$ is sent over $B+1$ blocks. In each block $b \in [1 : B+1]$:

- After obtaining all feedback messages $\mathbf{l}_{b-1}$, the transmitter sends inputs $x^n_{1,b}(m_b|\mathbf{l}_{b-1})$.
- Node $k \in [2 : N]$ uses compress-forward to compress its observed outputs $y^n_{k,b}$, and then forwards the compression message $l_{k,b}$ through feedback pipe and sends the channel inputs $x^n_{k,b+1}(l_{k,b})$ in block $b+1$.
- Each Receiver $d \in \mathcal{D}$ uses joint backward decoding to decode source message m_b and compression messages $\mathbf{l}_{b-1}$.

Note that the transmitter here simply forwards the feedback messages $\mathbf{l}_{b-1}$ and can reconstruct Node k's inputs $x^n_{k,b}(l_{k,b-1})$, for all $k \in [2 : N]$. Thus we are able to superpose the transmitter's inputs x^n_1 on the receivers' and relays' inputs $(x^n_2, \ldots, x^n_N)$, which attains cooperation between the transmitter and the receivers&relays.

The coding is explained with the help of Table II.

1) Codebook: Fix the pmf

$$\left[\prod_{k=2}^{N} P_{X_k}\right]\left[\prod_{k=2}^{N} P_{\hat{Y}_k|X_kY_k}\right] P_{X_1|X_2^N}P_{Y_1^N|X_1^N}. \tag{38}$$

For each block $b \in [1 : B+1]$ and $k \in [2 : N]$, randomly and independently generate $2^{n\hat{R}_k}$ sequences $x^n_{k,b}(l_{k,b-1}) \sim \prod_{i=1}^n P_{X_k}(x_{k,b,i})$, $l_{k,b-1} \in [1 : 2^{n\hat{R}_k}]$. For each $l_{k,b-1}$, randomly and independently generate $2^{n\hat{R}_k}$ sequences $\hat{y}^n_{k,b}(l_{k,b}|l_{k,b-1}) \sim \prod_{i=1}^n P_{\hat{Y}_k|X_k}(\hat{y}_{k,b,i}|x_{k,b,i})$. For each $\mathbf{l}_{b-1}$, randomly and independently generate 2^{nR} sequences $x^n_{1,b}(m_b|\mathbf{l}_{b-1}) \sim \prod_{i=1}^n P_{X_1|X_2^N}(x_{1,b,i}|x_{2,b,i}, \ldots, x_{N,b,i})$, $m_b \in [1 : 2^{nR}]$.

TABLE II

CODING SCHEME 1A FOR MULTICAST NETWORK WITH FEEDBACK

Block	1	2	...	B	$B+1$
X_1	$x^n_{1,1}(m_1\|\mathbf{1}_{[N-1]})$	$x^n_{1,2}(m_2\|\mathbf{l}_1)$	...	$x^n_{1,B}(m_B\|\mathbf{l}_{B-1})$	$x^n_{1,B+1}(1\|\mathbf{l}_B)$
X_k	$x^n_{k,1}(1)$	$x^n_{k,2}(l_{k,1})$	...	$x^n_{k,B}(l_{k,B-1})$	$x^n_{k,B+1}(l_{k,B})$
$\hat{Y}_k$	$\hat{y}^n_{k,1}(l_{k,1}\|1)$	$\hat{y}^n_{k,2}(l_{k,2}\|l_{k,1})$	...	$\hat{y}^n_{k,B}(l_{k,B}\|l_{k,B-1})$	$\hat{y}^n_{k,B+1}(1\|l_{k,B})$
Y_d	$\hat{m}_1$	$(\hat{m}_2, \hat{\mathbf{l}}_1)$	...	$\leftarrow (\hat{m}_B, \hat{\mathbf{l}}_{B-1})$	$\leftarrow \hat{\mathbf{l}}_B$

2) Source encoding: In each block $b \in [1 : B+1]$, assume that the transmitter already knows $\mathbf{l}_{b-1}$ through feedback pipes. It sends $x^n_{1,b}(m_b|\mathbf{l}_{b-1})$.

To ensure that source node perfectly knows $\mathbf{l}_{b-1}$, we have

$$\hat{R}_k \le R_{\text{Fb},k}. \tag{39}$$

3) Relay and receiver encoding: Relays and receivers both use compress-forward. In each block $b \in [1 : B]$, node $k \in [2 : N]$ compresses $y^n_{k,b}$ by finding a unique index $l_{k,b}$ such that

$$\left(x^n_{k,b}(l_{k,b-1}), \hat{y}^n_{k,b}(l_{k,b}|l_{k,b-1}), y^n_{k,b}\right) \in \mathcal{T}^n_{\epsilon/2}(P_{X_k Y_k \hat{Y}_k}).$$

Then, it sends $l_{k,b}$ through the feedback pipe at rate

$$\hat{R}_k \le R_{\text{Fb},k}, \quad \text{for } k \in [2 : N]. \tag{40}$$

and in block $b+1$ sends $x^n_{k,b+1}(l_{k,b})$.

By the covering lemma [23], this is successful with high probability if

$$\hat{R}_k > I(\hat{Y}_k; Y_k|X_k) + \delta(\epsilon/2), \quad \text{for } k \in [2 : N]. \tag{41}$$

4) Decoding: Receiver $d \in \mathcal{D}$ performs joint backward decoding. For each block $b \in [B+1, \dots, 1]$, it looks for $(\hat{m}_b, \hat{\mathbf{l}}_{b-1})$ such that [2]

$$\begin{aligned}&\big(x^n_{1,b}(\hat{m}_b|\hat{\mathbf{l}}_{b-1}), x^n_{2,b}(\hat{l}_{2,b-1}), \dots, x^n_{N,b}(\hat{l}_{N,b-1}), y^n_{d,b},\\ &\quad \hat{y}^n_{2,b}(\hat{l}_{2,b}|\hat{l}_{2,b-1}), \dots, \hat{y}^n_{N,b}(\hat{l}_{N,b}|\hat{l}_{N,b-1})\big) \in \mathcal{T}^n_\epsilon(P_{X_1^N \hat{Y}_2^N Y_d}).\end{aligned}$$

By the independence of the codebooks, the Markov lemma [23], packing lemma [23] and induction on backward decoding, this step is successful with high probability if

$$\begin{aligned}&R + \sum_{k\in\mathcal{T}} \hat{R}_k\\ &\quad < I(X_1, X(\mathcal{T}); \hat{Y}(\mathcal{T}^c), Y_d|X(\mathcal{T}^c)) + \sum_{k\in\mathcal{T}} H(\hat{Y}_k|X_k)\\ &\qquad - H(\hat{Y}(\mathcal{T})|X_1^N, \hat{Y}(\mathcal{T}^c), Y_d) - \delta(\epsilon)\end{aligned} \tag{42}$$

for all $\mathcal{T} \subset [2 : N]$ [3] with $\mathcal{T}^c \cap \mathcal{D} \ne \emptyset$.

Combining (39–42) and using Fourier-Motzkin elimination [23] to eliminate $\hat{R}_2, \dots, \hat{R}_N$, we obtain Theorem 1.

---

[2] Receiver $d \in \mathcal{D}$ knows $l_{d,b-1}$ since it generated this index. Since each Receiver d makes its own estimate of m_b and $\mathbf{l}_{b-1}$, the precise notation is $(\hat{m}^{(d)}_b, \hat{\mathbf{l}}^{(d)}_{b-1})$. For simplicity, we omit the superscript (d).

[3] Each receiver knows the compression message it generated, and it doesn't need to decode all compression indices $(l_{2,b-1}, \dots, l_{N,b-1})$, we therefore have $\mathcal{T} \subset [2 : N]$, rather than $\mathcal{T} \subseteq [2 : N]$.

B. Scheme 1B

In Scheme 1A above, the relays and receivers use only compress-forward. In this subsection we present a scheme where the relays perform mixed compress-forward and partial decode-forward.

Define

$$\mathbf{l}_b := (l_{2,b}, \dots, l_{N,b})$$
$$\hat{\mathbf{l}}_b := (\hat{l}_{2,b}, \dots, \hat{l}_{N,b})$$

for $b \in [1 : B+1]$ and let $\mathbf{l}_0 = \mathbf{1}_{[N-1]}$.

Transmission takes place in $B+1$ blocks each consisting of n transmissions, where a sequence of B i.i.d message $m_b \in [1 : 2^{nR}]$, $b \in [1 : B]$ is sent over $B+1$ blocks. Split the message m_b into (m'_b, m''_b), where m'_b and m''_b are independently and uniformly distributed over the sets $[1 : 2^{nR'}]$ and $[1 : 2^{nR''}]$, respectively, where $R', R'' \geq 0$ and so that

$$R = R' + R''. \tag{43}$$

Let $m''_{B+1} = m'_{B+1} = 1$. In each block $b \in [1 : B+1]$:

- After obtaining all feedback message $\mathbf{l}_{b-1}$, the transmitter sends inputs $x^n_{1,b}(m''_b | m'_b, m'_{b-1}, \mathbf{l}_{b-1})$;
- Each Relay $r \in \mathcal{R}$ first uses partial decode-forward to decode part of the source message, i.e., m'_b, and then uses compress-forward to compress its observed outputs $y^n_{k,b}$. Finally, it feeds the compression index $l_{k,b}$ back to the transmitter through the feedback pipe and broadcasts $x^n_{r,b}(m'_{b-1}, l_{r,b-1})$ in block $b+1$.
- Each Receiver $d \in \mathcal{D}$ first uses compress-forward to compress its observed outputs $y^n_{d,b}$. Then it feeds the compression index $l_{d,b}$ back to the transmitter through the feedback pipe and broadcasts $x^n_{d,b}(l_{d,b-1})$. Finally, it uses joint backward decoding to decode source message (m'_{b-1}, m''_b) and compression messages $\mathbf{l}_{b-1}$.

Similar to Scheme 1A, the transmitter's inputs $x^n_{1,b}$ are imposed on $x^n_{2,b}, \dots, x^n_{n,b}$ since it can reconstructs $x^n_{r,b}(m'_{b-1}, l_{r,b-1})$ and $x^n_{d,b}(l_{d,b-1})$, which attains cooperation between the transmitter and the receivers&relays.

The coding is explained with the help of Table III.

TABLE III
CODING SCHEME 1B FOR MULTICAST NETWORK WITH PARTIAL FEEDBACK

Block	1	2	…	B	$B+1$
X_1	$x^n_{1,1}(m''_1 \| m'_1, 1, \mathbf{1}_{[N-1]})$	$x^n_{1,2}(m''_2 \| m'_2, m'_1, \mathbf{l}_1)$	…	$x^n_{1,B}(m''_B \| m'_B, m'_{B-1}, \mathbf{l}_{B-1})$	$x^n_{1,B+1}(1 \| 1, m'_B, \mathbf{l}_B)$
X_r	$x^n_{r,1}(1,1)$	$x^n_{r,2}(m_1, l_{r,1})$	…	$x^n_{r,B}(m'_{B-1}, l_{r,B-1})$	$x^n_{r,B+1}(m'_B, l_{r,B})$
U_r	$u^n_{r,1}(m'_1 \| 1, 1)$	$u^n_{r,2}(m'_2 \| m_1, l_{r,1})$	…	$u^n_{r,B}(m'_B \| m'_{B-1}, l_{r,B-1})$	$u_{r,B+1}(1 \| m'_B, l_{r,B})$
$\hat{Y}_r$	$\hat{y}^n_{r,1}(l_{r,1} \| 1, 1)$	$\hat{y}^n_{r,2}(l_{r,2} \| m_1, l_{r,1})$	…	$\hat{y}^n_{r,B}(l_{r,B} \| m'_{B-1}, l_{r,B-1})$	$\hat{y}^n_{r,B+1}(1 \| \hat{m}'_B, l_{r,B})$
X_d	$x^n_{d,1}(1)$	$x^n_{d,2}(l_{d,1})$	…	$x^n_{d,B}(l_{d,B-1})$	$x^n_{d,B+1}(l_{d,B})$
$\hat{Y}_d$	$\hat{y}^n_{d,1}(l_{d,1} \| 1)$	$\hat{y}^n_{d,2}(l_{d,2} \| l_{d,1})$	…	$\hat{y}^n_{d,B}(l_{d,B} \| l_{d,B-1})$	$\hat{y}^n_{d,B+1}(1 \| l_{d,B})$
Y_d	$\hat{m}''_1$	$\leftarrow (\hat{m}''_2, \hat{m}'_1, \hat{\mathbf{l}}_1)$	…	$\leftarrow (\hat{m}''_B, \hat{m}'_{B-1}, \hat{\mathbf{l}}_{B-1})$	$\leftarrow (\hat{m}'_B, \hat{\mathbf{l}}_B)$

1) *Codebook:*

Fix pmf

$$\left[\prod_{r\in\mathcal{R}} P_{X_r U_r} P_{\hat{Y}_r | U_r X_r Y_r}\right] \left[\prod_{d\in\mathcal{D}} P_{X_d} P_{\hat{Y}_d | X_d Y_d}\right] \times P_{X_1 | X_2^N U(\mathcal{R})} P_{Y_1^N | X_1^N}. \tag{44}$$

For each $r \in \mathcal{R}$ and block $b \in [1 : B+1]$, randomly and independently generate $2^{n(R'+\hat{R}_r)}$ sequences $x^n_{r,b}(m'_{b-1}, l_{r,b-1}) \sim \prod_{i=1}^n P_{X_r}(x_{r,b,i})$, with $m'_{b-1} \in [1 : 2^{nR'}]$ and $l_{r,b-1} \in [1 : 2^{n\hat{R}_r}]$. For each $(m'_{b-1}, l_{r,b-1})$, randomly and independently generate $2^{nR'}$ sequences $u_{r,b}^n(m_b'|m_{b-1}', l_{r,b-1}) \sim \prod_{i=1}^n P_{U_r|X_r}(u_{r,b,i}|x_{r,b,i})$. For each $(m_b', m_{b-1}', l_{r,b-1})$, randomly and independently generate $2^{n\hat{R}_r}$ sequences $\hat{y}_{r,b}^n(l_{r,b}|m_b', m_{b-1}', l_{r,b-1}) \sim \prod_{i=1}^n P_{\hat{Y}_r|U_rX_r}(\hat{y}_{r,b,i}|u_{r,b,i}, x_{r,b,i})$.

For each $d \in \mathcal{D}$ and block $b \in [1 : B+1]$, randomly and independently generate $2^{n\hat{R}_d}$ sequences $x_{d,b}^n(l_{d,b-1}) \sim \prod_{i=1}^n P_{X_d}(x_{d,b,i})$, $l_{d,b-1} \in [1 : 2^{n\hat{R}_d}]$. For each $l_{d,b-1}$, randomly and independently generate $2^{n\hat{R}_d}$ sequences $\hat{y}_{d,b}^n(l_{d,b}|l_{d,b-1}) \sim \prod_{i=1}^n P_{\hat{Y}_d|X_d}(\hat{y}_{d,b,i}|x_{d,b,i})$.

For each $(m_b', m_{b-1}', \mathbf{l}_{b-1})$, randomly and independently generate $2^{nR''}$ sequences $x_{1,b}^n(m_b''|m_b', m_{b-1}', \mathbf{l}_{b-1}) \sim \prod_{i=1}^n P_{X_1|U(\mathcal{R})X_2^N}(x_{1,b,i}|\{u_{r,b,i}\}_{r\in\mathcal{R}}, x_{2,b,i}, \dots, x_{N,b,i})$.

2) Source encoding: In each block $b \in [1 : B+1]$, assume that the transmitter already knows $\mathbf{l}_{b-1}$ through the feedback pipes. It sends $x_{1,b}^n(m_b''|m_b', m_{b-1}', \mathbf{l}_{b-1})$.

To ensure that the transmitter perfectly knows $\mathbf{l}_{b-1}$, we have

$$\hat{R}_k \le R_{\mathrm{Fb},k}, \quad \text{for } k \in [2 : N]. \tag{45}$$

3) Relay encoding: Relay nodes perform the mixed compress-forward and decode-forward. For each block $b \in [1 : B+1]$, assume that Relay $r \in \mathcal{R}$ already knows $\hat{m}_{b-1}'$ from block $b-1$. It looks for a unique index $\hat{m}_b'$ such that [4]

$$\big(x_{r,b}^n(\hat{m}_{b-1}', l_{r,b-1}), u_{r,b}^n(\hat{m}_b'|\hat{m}_{b-1}', l_{r,b-1}), y_{r,b}^n\big) \in \mathcal{T}_{\epsilon/4}^n(P_{X_rY_rU_r}).$$

then it compresses $y_{r,b}^n$ by finding a unique index $l_{r,b}$ such that

$$\begin{aligned}&\big(u_{r,b}^n(\hat{m}_b'|\hat{m}_{b-1}', l_{r,b-1}), x_{r,b}^n(\hat{m}_{b-1}', l_{r,b-1}),\\ &\quad \hat{y}_{r,b}^n(l_{r,b}|\hat{m}_b', \hat{m}_{b-1}', l_{r,b-1}), y_{r,b}^n\big) \in \mathcal{T}_{\epsilon/2}^n(P_{U_rX_rY_r\hat{Y}_r}).\end{aligned}$$

Then, it sends $l_{r,b}$ through the feedback pipe at rate $\hat{R}_r \le R_{\mathrm{Fb},r}$ and in block $b+1$ sends $x_{r,b+1}^n(\hat{m}_b', l_{r,b})$.

By the covering and packing lemmas, this is successful with high probability if for $r \in \mathcal{R}$,

$$R' < I(U_r; Y_r|X_r) - \delta(\epsilon/4) \tag{46a}$$

$$\hat{R}_r > I(\hat{Y}_r; Y_r|X_r, U_r) + \delta(\epsilon/2). \tag{46b}$$

4) Receiver encoding: Receiver $d \in \mathcal{D}$ compresses $y_{d,b}^n$ by finding a unique index $l_{d,b}$ such that

$$\big(x_{d,b}^n(l_{d,b-1}), \hat{y}_{d,b}^n(l_{d,b}|l_{d,b-1}), y_{d,b}^n\big) \in \mathcal{T}_{\epsilon/2}^n(P_{X_dY_d\hat{Y}_d}).$$

Then, it sends $l_{d,b}$ through the feedback pipe at rate

$$\hat{R}_d \le R_{\mathrm{Fb},d}$$

and in block $b+1$ sends $x_{d,b+1}^n(l_{d,b})$.

By the covering lemma, this is successful with high probability if

$$\hat{R}_d > I(\hat{Y}_d; Y_d|X_d) + \delta(\epsilon/2). \tag{47}$$

---

[4] Since each Relay $r \in \mathcal{R}$ makes its own estimate of m_b', the precise notation $\hat{m}_b'^{(r)}$. For simplicity, we omit the superscript (r).

5) Decoding: Receiver $d \in \mathcal{D}$ performs backward decoding. For each block $b \in [B+1, \dots, 1]$, it looks for $(\hat{m}''_b, \hat{m}'_{b-1}, \hat{\mathbf{l}}_{b-1})$ such that [5]

$$\begin{aligned}\big(x^n_{1,b}(\hat{m}''_b|\hat{m}'_b, \hat{m}'_b, \hat{\mathbf{l}}_{b-1}), \mathbf{x}^n_b(\mathcal{R}), \mathbf{x}^n_b(\mathcal{D}), \mathbf{u}^n_b(\mathcal{R}),&\\ \hat{\mathbf{y}}^n_b(\mathcal{R}), \hat{\mathbf{y}}^n_b(\mathcal{D}), y^n_{d,b}\big) \in \mathcal{T}^n_\epsilon(P_{X_1^N U(\mathcal{R}) \hat{Y}_2^N Y_d})&\end{aligned}$$

where

$$\begin{aligned}\mathbf{x}^n_b(\mathcal{R}) &:= \{x^n_{r,b}(\hat{m}'_{b-1}, \hat{l}_{r,b-1}) : r \in \mathcal{R}\}\\ \mathbf{x}^n_b(\mathcal{D}) &:= \{x^n_{d,b}(\hat{l}_{d,b-1}) : d \in \mathcal{D}\}\\ \mathbf{u}^n_b(\mathcal{R}) &:= \{u^n_{r,b}(\hat{m}'_b|\hat{m}'_{b-1}, \hat{l}_{r,b-1}) : r \in \mathcal{R}\}\\ \hat{\mathbf{y}}^n_b(\mathcal{R}) &:= \{\hat{y}^n_{r,b}(\hat{l}_{r,b}|\hat{m}'_b, \hat{m}'_{b-1}, \hat{l}_{r,b-1}) : r \in \mathcal{R}\}\\ \hat{\mathbf{y}}^n_b(\mathcal{D}) &:= \{\hat{y}^n_{d,b}(\hat{l}_{d,b}|\hat{l}_{d,b-1}) : d \in \mathcal{D}\}.\end{aligned}$$

By the independence of the codebooks, the Markov lemma, packing lemma and the induction on backward decoding, the decoding is successful with high probability if

$$\begin{aligned}&R + \hat{R}(\mathcal{T} \cup \mathcal{R})\\ &\quad < I(X_1, X(\mathcal{T} \cup \mathcal{R}), U(\mathcal{R}); \hat{Y}(\mathcal{T}^c \cap \mathcal{D}), Y_d | X(\mathcal{T}^c \cap \mathcal{D}))\\ &\qquad + \sum_{k \in \mathcal{R}} H(\hat{Y}_k | U_k, X_k) + \sum_{j \in \mathcal{D} \cap \mathcal{T}} H(\hat{Y}_j | X_j)\\ &\qquad - H(\hat{Y}(\mathcal{T} \cup \mathcal{R}) | X_2^N, U_2^N, \hat{Y}(\mathcal{T}^c \cap \mathcal{D}), Y_d) - \delta(\epsilon)\end{aligned} \tag{48}$$

and

$$\begin{aligned}&R'' + \hat{R}(\mathcal{T})\\ &\quad < I(X_1, X(\mathcal{T}), U(\mathcal{T}); \hat{Y}(\mathcal{T}^c), Y_d | X(\mathcal{T}^c)))\\ &\qquad + \sum_{k \in \mathcal{R} \cap \mathcal{T}} H(\hat{Y}_k | U_k, X_k) + \sum_{j \in \mathcal{D} \cap \mathcal{T}} H(\hat{Y}_j | X_j)\\ &\qquad - H(\hat{Y}(\mathcal{T}) | X_2^N, U_2^N, \hat{Y}(\mathcal{T}^c), Y_d) - \delta(\epsilon)\end{aligned} \tag{49}$$

for all $\mathcal{T} \subset [2:N]$ with $\mathcal{T}^c \cap \mathcal{D} \neq \emptyset$, where $\mathcal{T}^c$ is the complement of T in $[2:N]$, and $U_d = \emptyset$, for $d \in \mathcal{D}$.

Combining (43–49), and using Fourier-Motzkin elimination to eliminate $R', R'', \hat{R}_2, \dots, \hat{R}_N$, we obtain Theorem 2.

C. Scheme 1C

In Scheme 1B, all relay nodes decode the same part of the source message, which may lead to low achievable rates if some relay's observed outputs are very bad. In this subsection, we describe another scheme (Scheme 1C), which allows different relays to decode different parts of the source message. This new scheme can achieve higher rates than Scheme 1A and 1B.

Transmission takes place in $B+1$ blocks each consisting of n transmissions, where a sequence of B i.i.d message $m_b \in [1:2^{nR}]$, $b \in [1:B]$ is sent over $B+1$ blocks. Split the message m_b into

$$\big(m'_{0,b}, \{m'_{r,b} : r \in \mathcal{R}\}, m''_b\big).$$

---

[5] Receiver $d \in \mathcal{D}$ knows $l_{d,b-1}$ since it generated this index. Since each Receiver d makes its own estimate of $(m''_b, m'_{b-1}, \mathbf{l}_{b-1})$, the precise notation is $(\hat{m}''^{(d)}_b, \hat{m}'^{(d)}_{b-1}, \hat{\mathbf{l}}^{(d)}_{b-1})$. For simplicity, we omit the superscript (d).

where messages $m'_{0,b}$, $m'_{r,b}$ and m''_b are independently and uniformly distributed over the sets $[1:2^{nR'_0}]$, $[1:2^{nR'_r}]$ and $[1:2^{nR''}]$, respectively, where $R'_0, R'_r, R'' \geq 0$ and so that

$$R = R'_0 + \sum_{r\in\mathcal{R}} R'_r + R''. \tag{50}$$

TABLE IV
CODING SCHEME 1C FOR MULTICAST NETWORK WITH FEEDBACK

Block	1	$\ldots$	B	$B+1$
X_1	$x^n_{1,1}(m''_1\vert\mathbf{m}'_1, \mathbf{1}_{[\vert\mathcal{R}\vert+1]}, \mathbf{1}_{[N-1]})$	$\ldots$	$x^n_{1,B}(m''_B\vert\mathbf{m}'_B, \mathbf{m}'_{B-1}, \mathbf{l}_{B-1})$	$x^n_{1,B+1}(1\vert\mathbf{1}_{[\vert\mathcal{R}\vert+1]}, \mathbf{m}'_B, \mathbf{l}_B)$
V_0	$v^n_{0,1}(1)$	$\ldots$	$v^n_{0,B}(m'_{0,B-1})$	$v^n_{0,B}(m'_{0,B})$
U_0	$u^n_{0,1}(m'_{0,1}\vert 1)$	$\ldots$	$u^n_{0,B}(m'_{0,B}\vert m'_{0,B-1})$	$u^n_{0,B+1}(m'_{0,B}\vert m'_{0,B-1})$
X_r	$x^n_{r,1}(1,1\vert 1)$	$\ldots$	$x^n_{r,B}(m'_{r,B-1}, l_{r,B-1}\vert m'_{0,B-1})$	$x^n_{r,B+1}(m'_{r,B}, l_{r,B}\vert m'_{0,B})$
U_r	$u^n_{r,1}(m'_{r,1}\vert m'_{0,1}, 1, 1, 1)$	$\ldots$	$u^n_{r,B}(m'_{r,B}\vert m'_{0,B}, m'_{0,B-1}, m'_{r,B-1}, l_{r,B-1})$	$u^n_{r,B+1}(1\vert 1, m'_{0,B}, m'_{r,B}, l_{r,B})$
$\hat{Y}_r$	$\hat{y}^n_{r,1}(l_{r,1}\vert m'_{0,1}, m'_{r,1}, 1, 1, 1)$	$\ldots$	$\hat{y}^n_{r,B}(l_{r,B}\vert m'_{0,B}, m'_{r,B}, m'_{0,B-1}, m'_{r,B-1}, l_{r,B-1})$	$\hat{y}^n_{r,B+1}(1\vert 1, m'_{r,B}, m'_{0,B}, m'_{r,B}, l_{r,B})$
X_d	$x^n_{d,1}(1)$	$\ldots$	$x^n_{d,B}(l_{d,B-1})$	$x^n_{d,B+1}(l_{d,B})$
$\hat{Y}_d$	$\hat{y}^n_{d,1}(l_{d,1}\vert 1)$	$\ldots$	$\hat{y}^n_{d,B}(l_{d,B}\vert l_{d,B-1})$	$\hat{y}^n_{d,B+1}(1\vert l_{d,B})$
Y_d	$\hat{m}''_1$	$\ldots$	$\leftarrow (\hat{m}''_B, \hat{\mathbf{m}}'_{B-1}, \hat{\mathbf{l}}_{B-1})$	$\leftarrow (\hat{\mathbf{m}}'_B, \hat{\mathbf{l}}_B)$

Define

$$\begin{aligned}
\mathbf{m}'_b &:= \left(m'_{0,b}, \{m'_{r,b} : r\in\mathcal{R}\}\right)\\
\mathbf{l}_b &:= (l_{2,b}, \ldots, l_{N,b})\\
\hat{\mathbf{l}}_b &:= (\hat{l}_{2,b}, \ldots, \hat{l}_{N,b})\\
\hat{\mathbf{m}}'_b &= \left(\hat{m}'_{0,b}, \{\hat{m}'_{r,b} : r\in\mathcal{R}\}\right)
\end{aligned}$$

for $b\in[1:B+1]$. Let $m''_{B+1} = m'_{r,B+1} = m'_{r,0} = m'_{0,0} = 1$ and $\mathbf{l}_0 = \mathbf{1}_{[N-1]}$. In each block $b\in[1:B+1]$:

- After obtaining all feedback messages $\mathbf{l}_{b-1}$, the transmitter sends $x^n_{1,b}(m''_b\vert\mathbf{m}'_b, \mathbf{m}'_{b-1}, \mathbf{l}_{b-1})$.
- Each Relay $r\in\mathcal{R}$ decodes $(m'_{0,b}, m'_{r,b})$ and generates the compression message $l_{r,b}$ by compressing its channel outputs $y^n_{r,b}$. Then, it forwards $l_{r,b}$ to the transmitter over the feedback pipe and sends the channel inputs $x^n_{r,b+1}(m'_{r,b}, l_{r,b}\vert m'_{0,b})$ in block $b+1$.
- Each Receiver $d\in\mathcal{D}$ first compresses its channel outputs $y^n_{d,b}$ and then forwards the compression message $l_{d,b}$ through feedback pipe and sends the channel inputs $x^n_{d,b+1}(l_{r,b})$ in block $b+1$. Finally, it uses joint backward decoding to decode source message $(\mathbf{m}'_{b-1}, m''_b)$ and compression messages $\mathbf{l}_{b-1}$.

Similar to Scheme 1A, the transmitter's inputs $x^n_{1,b}$ are superposed on $(x^n_{2,b}, \ldots, x^n_{n,b})$ since it can reconstruct $x^n_{k,b}$, for all $k\in[2:N]$, which attains cooperation between the transmitter and the receivers&relays.

The coding is explained with the help of Table IV.

1) Codebook: Fix pmfs

$$\begin{aligned}
&P_{V_0}P_{U_0|V_0}\left[\prod_{r\in\mathcal{R}} P_{X_r|V_0}P_{U_r|V_0U_0X_r}P_{\hat{Y}_r|V_0U_0U_rX_rY_r}\right]\\
&\qquad\times\left[\prod_{d\in\mathcal{D}} P_{X_d}P_{\hat{Y}_d|X_dY_d}\right]P_{X_1|X_2^N U(\mathcal{R})}.
\end{aligned} \tag{51}$$

For each block $b\in[1:B+1]$, randomly and independently generate $2^{nR'_0}$ sequences $v^n_{0,b}(m'_{0,b-1}) \sim \prod_{i=1}^n P_{V_0}(v_{b,i})$, with $m'_{0,b-1}\in[1:2^{nR'_0}]$. For each $m'_{0,b-1}$, randomly and independently generate $2^{nR'_0}$ sequences $u^n_{0,b}(m'_{0,b}|m'_{0,b-1}) \sim \prod_{i=1}^n P_{U_0|V_0}(u_{0,b,i}|v_{0,b,i})$.

For each $r \in \mathcal{R}$ and each $m'_{0,b-1}$, randomly and independently generate $2^{n(R'_r+\hat{R}_r)}$ sequences $x^n_{r,b}(m'_{r,b-1}, l_{r,b-1}|m'_{0,b-1}) \sim \prod_{i=1}^n P_{X_r|V_0}(x_{r,b,i}|v_{0,b,i})$, with $m'_{r,b-1} \in [1:2^{nR'_r}]$ and $l_{r,b-1} \in [1:2^{n\hat{R}_r}]$. For each $(m'_{r,b-1}, m'_{0,b}, m'_{0,b-1}, l_{r,b-1})$, randomly and independently generate $2^{nR'_r}$ sequences $u^n_{r,b}(m'_{r,b}|m'_{0,b}, m'_{0,b-1}, m'_{r,b-1}, l_{r,b-1}) \sim \prod_{i=1}^n P_{U_r|V_0U_0X_r}(u_{r,b,i}|v_{0,b,i}, u_{0,b,i}, x_{r,b,i})$. For each $(m'_{0,b}, m'_{0,b-1}, m'_{r,b}, m'_{r,b-1}, l_{r,b-1})$, randomly and independently generate $2^{n\hat{R}_r}$ sequences $\hat{y}^n_{r,b}(l_{r,b}|m'_{0,b}, m'_{r,b}, m'_{0,b-1}, m'_{r,b-1}, l_{r,b-1}) \sim \prod_{i=1}^n P_{\hat{Y}_r|V_0U_0U_rX_r}(\hat{y}_{r,b,i}|v_{0,b,i}, u_{0,b,i}, u_{r,b,i}, x_{r,b,i})$.

For each $d \in \mathcal{D}$ and block $b \in [1:B+1]$, randomly and independently generate $2^{n\hat{R}_d}$ sequences $x^n_{d,b}(l_{d,b-1}) \sim \prod_{i=1}^n P_{X_d}(x_{d,b,i})$, $l_{d,b-1} \in [1:2^{n\hat{R}_d}]$. For each $l_{d,b-1}$, randomly and independently generate $2^{n\hat{R}_d}$ sequences $\hat{y}^n_{d,b}(l_{d,b}|l_{d,b-1}) \sim \prod_{i=1}^n P_{\hat{Y}_d|X_d}(\hat{y}_{d,b,i}|x_{d,b,i})$.

For each $(\mathbf{m}'_b, \mathbf{m}'_{b-1}, \mathbf{l}_{b-1})$, randomly and independently generate $2^{nR''}$ sequences $x^n_{1,b}(m''_b|\mathbf{m}'_b, \mathbf{m}'_{b-1}, \mathbf{l}_{b-1}) \sim \prod_{i=1}^n P_{X_1|V_0U_0U(\mathcal{R})X_2^N}(x_{1,b,i}|v_{0,b,i}, u_{0,b,i}, x_{2,b,i}, \ldots, x_{N,b,i}, \{u_{r,b,i} : r \in \mathcal{R}\})$.

2) Source encoding: In each block $b \in [1:B+1]$, assume that the transmitter already knows $\mathbf{l}_{b-1}$ through the feedback pipes. It sends $x^n_{1,b}(m''_b|\mathbf{m}'_b, \mathbf{m}'_{b-1}, \mathbf{l}_{b-1})$.

To ensure that the transmitter perfectly knows $\mathbf{l}_{b-1}$, we have

$$\hat{R}_k \leq R_{\text{Fb},k}, \quad \text{for } k \in [2:N]. \tag{52}$$

3) Relay encoding: Relay nodes perform hybrid compress-forward and decode-forward. For each block $b \in [1:B+1]$, assume that Relay $r \in \mathcal{R}$ already knows $(\hat{m}'_{0,b-1}, \hat{m}'_{r,b-1})$ from block $b-1$. It looks for a unique index $\hat{m}'_{0,b}$ such that

$$\begin{aligned}&\big(v^n_{0,b}(\hat{m}'_{0,b-1}), u^n_{0,b}(\hat{m}'_{0,b}|\hat{m}'_{0,b-1}), y^n_{r,b},\\ &\quad x^n_{r,b}(\hat{m}'_{r,b-1}, l_{r,b-1}|\hat{m}'_{0,b-1})\big) \in \mathcal{T}^n_{\epsilon/8}(P_{V_0U_0X_rY_r}).\end{aligned}$$

Then it looks for $\hat{m}'_{r,b}$ such that

$$\begin{aligned}&\big(v^n_{0,b}(\hat{m}'_{0,b-1}), u^n_{0,b}(\hat{m}'_{0,b}|\hat{m}'_{0,b-1}),\\ &\quad u^n_{r,b}(\hat{m}'_{r,b}|\hat{m}'_{0,b}, \hat{m}'_{0,b-1}, m'_{r,b-1}, l_{r,b-1})\\ &\qquad x^n_{r,b}(\hat{m}'_{r,b-1}, l_{r,b-1}|\hat{m}'_{0,b-1}), y^n_{r,b}\big) \in \mathcal{T}^n_{\epsilon/4}(P_{V_0U_0X_rY_rU_r}).\end{aligned}$$

After decoding $(\hat{m}'_{0,b}, \hat{m}'_{r,b})$, it compresses $y^n_{r,b}$ by finding a unique index $l_{r,b}$ such that

$$\begin{aligned}&\big(v^n_{0,b}(\hat{m}'_{0,b-1}), u^n_{0,b}(\hat{m}'_{0,b}|\hat{m}'_{0,b-1}),\\ &\quad u^n_{r,b}(\hat{m}'_{r,b}|\hat{m}'_{0,b}, \hat{m}'_{0,b-1}, m'_{r,b-1}, l_{r,b-1})\\ &\qquad \hat{y}^n_{r,b}(l_{r,b}|\hat{m}'_{0,b}, \hat{m}'_{0,b-1}, \hat{m}'_{r,b}, \hat{m}'_{r,b-1}, l_{r,b-1}), y^n_{r,b},\\ &\qquad\quad x^n_{r,b}(\hat{m}'_{r,b-1}, l_{r,b-1}|\hat{m}'_{0,b-1})\big) \in \mathcal{T}^n_{\epsilon/2}(P_{V_0U_0U_rX_rY_r\hat{Y}_r}).\end{aligned}$$

Finally, it sends $l_{r,b}$ through the feedback pipe at rate

$$\hat{R}_r \leq R_{\text{Fb},r} \tag{53}$$

and in block $b+1$ it sends $x^n_{r,b+1}(\hat{m}'_{r,b}, l_{r,b}|\hat{m}'_{0,b})$.

By the covering and packing lemmas, these are successful with high probability if for $r \in \mathcal{R}$,

$$R'_0 < I(U_0; Y_r|V_0, X_r) - \delta(\epsilon/8) \tag{54a}$$

$$R'_r < I(U_r; Y_r|X_r, U_0, V_0) - \delta(\epsilon/4) \tag{54b}$$

$$\hat{R}_r > I(\hat{Y}_r; Y_r|U_0, X_r, U_r, V_0) + \delta(\epsilon/2) \tag{54c}$$

4) Receiver encoding: Receiver $d \in \mathcal{D}$ compresses $y^n_{d,b}$ by finding a unique index $l_{d,b}$ such that

$$\big(x^n_{d,b}(l_{d,b-1}), \hat{y}^n_{d,b}(l_{d,b}|l_{d,b-1}), y^n_{d,b}\big) \in \mathcal{T}^n_{\epsilon/2}(P_{X_dY_d\hat{Y}_d}).$$

Then, it sends $l_{d,b}$ through the feedback pipe at rate

$$\hat{R}_d \leq R_{\text{Fb},d} \tag{55}$$

and in block $b+1$ sends $x^n_{d,b+1}(l_{d,b})$.

By the covering lemma, this is successful with high probability if

$$\hat{R}_d > I(\hat{Y}_d; Y_d|X_d) + \delta(\epsilon/2), \quad \text{for } d \in \mathcal{D}. \tag{56}$$

5) Decoding: Receiver $d \in \mathcal{D}$ performs backward decoding. For each block $b \in [B+1, \dots, 1]$, it looks for $(\hat{m}''_b, \hat{\mathbf{m}}'_{b-1}, \hat{\mathbf{l}}_{b-1})$ such that [6]

$$\begin{aligned}
&\big(x^n_{1,b}(\hat{m}''_b|\hat{\mathbf{m}}'_b, \hat{\mathbf{m}}'_{b-1}, \hat{\mathbf{l}}_{b-1}), \mathbf{x}^n_b(\mathcal{R}), \mathbf{x}^n_b(\mathcal{D}),\\
&\qquad v^n_{0,b}(\hat{m}'_{0,b-1}), u^n_{0,b}(\hat{m}'_{0,b}|\hat{m}'_{0,b-1}), \mathbf{u}^n_b(\mathcal{R}),\\
&\qquad\qquad \hat{\mathbf{y}}^n_b(\mathcal{R}), \hat{\mathbf{y}}^n_b(\mathcal{D}), y^n_{d,b}\big) \in \mathcal{T}^n_\epsilon(P_{V_0U_0X_1^NU(\mathcal{R})\hat{Y}_2^NY_d})
\end{aligned}$$

where

$$\begin{aligned}
\mathbf{x}^n_b(\mathcal{R}) &:= \{x^n_{r,b}(\hat{m}'_{r,b-1}, \hat{l}_{r,b-1}|\hat{m}'_{0,b-1}) : r \in \mathcal{R}\}\\
\mathbf{x}^n_b(\mathcal{D}) &:= \{x^n_{d,b}(\hat{l}_{d,b-1}) : d \in \mathcal{D}\}\\
\mathbf{u}^n_b(\mathcal{R}) &:= \{u^n_{r,b}(\hat{m}'_{r,b}|\hat{m}'_{0,b}, \hat{m}'_{0,b-1}, \hat{m}'_{r,b-1}, \hat{l}_{r,b-1}) : r \in \mathcal{R}\}\\
\hat{\mathbf{y}}^n_b(\mathcal{R}) &:= \{\hat{y}^n_{r,b}(\hat{l}_{r,b}|\hat{m}'_{0,b}, \hat{m}'_{r,b}, \hat{m}'_{0,b-1}, \hat{m}'_{r,b-1}, \hat{l}_{r,b-1}) : r \in \mathcal{R}\}\\
\hat{\mathbf{y}}^n_b(\mathcal{D}) &:= \{\hat{y}^n_{d,b}(\hat{l}_{d,b}|\hat{l}_{d,b-1}) : d \in \mathcal{D}\}.
\end{aligned}$$

By the independence of the codebooks, the Markov lemma, packing lemma and the induction on backward decoding, the decoding is successful with high probability if

$$\begin{aligned}
&R'' + \sum_{k\in\mathcal{T}} \hat{R}_k + \sum_{k\in\mathcal{T}\cap\mathcal{R}} R'_k\\
&\quad < I(X_1, X(\mathcal{T}), U(\mathcal{T}); \hat{Y}(\mathcal{T}^c), Y_d|V_0, U_0, X(\mathcal{T}^c), U(\mathcal{T}^c))\\
&\qquad + \sum_{k\in\mathcal{R}\cap\mathcal{T}} H(\hat{Y}_k|V_0, U_0, U_k, X_k) + \sum_{j\in\mathcal{D}\cap\mathcal{T}} H(\hat{Y}_j|X_j)\\
&\qquad - H(\hat{Y}(\mathcal{T})|V_0, U_0, X_1^N, U_2^N, \hat{Y}(\mathcal{T}^c), Y_d) - \delta(\epsilon)
\end{aligned} \tag{57}$$

and

$$\begin{aligned}
&R + \sum_{k\in\mathcal{T}\cup\mathcal{R}} \hat{R}_k\\
&\quad < I(V, U_0, X_1, X(\mathcal{T}\cup\mathcal{R}), U(\mathcal{R});\\
&\qquad\qquad\qquad \hat{Y}(\mathcal{T}^c\cap\mathcal{D}), Y_d|X(\mathcal{T}^c\cap\mathcal{D}))\\
&\qquad + \sum_{k\in\mathcal{R}} H(\hat{Y}_k|V_0, U_0, U_k, X_k) + \sum_{j\in\mathcal{D}\cap\mathcal{T}} H(\hat{Y}_j|X_j)\\
&\qquad - H(\hat{Y}(\mathcal{T}\cup\mathcal{R})|V_0, U_0, X_1^N, U_2^N, \hat{Y}(\mathcal{T}^c\cap\mathcal{D}), Y_d) - \delta(\epsilon)
\end{aligned} \tag{58}$$

---

[6] Receiver $d \in \mathcal{D}$ knows $l_{d,b-1}$ since it generated this index. Since each Receiver d makes its own estimate of $(m''_b, \mathbf{m}'_{b-1}, \mathbf{l}_{b-1})$, the precise notation is $(\hat{m}''^{(d)}_b, \hat{\mathbf{m}}'^{(d)}_{b-1}, \hat{\mathbf{l}}^{(d)}_{b-1})$. For simplicity, we omit the superscript (d).

for all $\mathcal{T} \subset [2:N]$ with $\mathcal{T}^c \cap \mathcal{D} \neq \emptyset$, where $\mathcal{T}^c$ is the complement of T in $[2:N]$, and $U_d = \emptyset$, for $d \in \mathcal{D}$.

Combining (50–58), and using Fourier-Motzkin elimination to eliminate $\hat{R}_2, \ldots, \hat{R}_N, R''$ and R'_r, for $r \in \mathcal{R}$, we obtain Theorem 3.

VII. DISCRETE MEMORYLESS MULTICAST NETWORK

In Section VI we proposed block-Markov coding schemes for DM-MN with instantaneous, rate-limited and noisy-free feedback. Recall the NNC scheme [6], [8], [9] for DM-MN without feedback, where each node (including the transmitter) compresses its observed signals and sends the corresponding compression message in the next block. Comparing our coding schemes with NNC, we observe that both schemes involve block-Markov coding, compressing channel outputs and sending compression messages. However, our scheme allows hybrid relaying strategies at relay nodes, and in each block, instead of creating a new compression index, the transmitter forwards all compression indices generated by the receivers and relays. In our scheme, the transmitter and the relays&receivers cooperate with each other through feedback, and different nodes operate differently according to the features of the network, which leads to a larger achievable rate than NNC, as shown by examples in Section V.

Motivated by our feedback coding scheme, we propose another scheme for DM-MN *without* feedback. The key idea is that in each block, instead of obtaining the compression messages through feedback pipes, the transmitter decodes them based on its observed channel outputs. One must be cautious that when in absence of feedback, the transmitter's inputs $x_{1,b}^n$ cannot be superposed on the receivers' and relays' inputs $(x_{2,b}^n, \ldots, x_{N,b}^n)$ like the feedback case. This is because, in each block b, Node k creates compression message $l_{k,b}$ by compressing compressing $y_{k,b}^n$, and sends $x_{k,b+1}(\cdot, l_{k,b})$ in block $b+1$. The transmitter has to wait to observe the channel outputs $y_{1,b+1}^n$ and then decodes $l_{k,b}$, which means that at the beginning of each block b, the transmitter can only reconstruct $x_{k,b-1}^n$ before the transmission.

To ensure the cooperation between the transmitter and the receivers&relays, we made the following modification: Transmission takes place in $B+2$ blocks each consisting of n transmissions. In each block b, each Node $k \in [2:N]$ creates a compression index $l_{k,b-1}$ and sends $(l_{k,b-1}, l_{k,b-2})$. The transmitter, after observing $y_{1,b}^n$, first decodes compression indices $\mathbf{l}_{b-1}$, which is in essence a coding problem on a multiple access channel $P_{Y_1|X_2,\ldots,X_N}$ with side information $x_{1,b}^n$. Then in block $b+1$, the transmitter sends compression messages $\mathbf{l}_{b-1}$ with source message m_{b+1}. The coding is explained with the help of V.

TABLE V

CODING SCHEME FOR MULTICAST NETWORK WITHOUT FEEDBACK

Block	1	$\ldots$	B	$B+1$	$B+2$
X_1	$x_{1,1}^n(m''_1 \vert m'_1, 1, \mathbf{1})$	$\ldots$	$x_{1,B}^n(m''_B \vert m'_B, m'_{B-1}, \mathbf{l}_{B-2})$	$x_{1,B+1}^n(1 \vert 1, m'_B, \mathbf{l}_{B-1})$	$x_{1,B+2}^n(1 \vert 1, 1, \mathbf{l}_B)$
V_r	$v_{r,1}(1,1)$	$\ldots$	$v_{r,B}^n(m'_{B-1}, l_{r,B-2})$	$v_{r,B+1}^n(m'_B, l_{r,B-1})$	$v_{r,B+2}^n(1, l_{r,B})$
X_r	$x_{r,1}^n(1 \vert 1, 1)$	$\ldots$	$x_{r,B}^n(l_{r,B-1} \vert m'_{B-1}, l_{r,B-2})$	$x_{r,B+1}^n(l_{r,B} \vert \hat{m}'_B, l_{r,B-1})$	$x_{r,B+2}^n(1 \vert 1, l_{r,B})$
U_r	$u_{r,1}(m'_1 \vert 1, 1)$	$\ldots$	$u_{r,B}^n(m'_B \vert m'_{B-1}, l_{r,B-2})$	$u_{r,B+1}^n(1 \vert m'_B, l_{r,B-1})$	$u_{r,B+2}^n(1 \vert 1, l_{r,B})$
$\hat{Y}_r$	$\hat{y}_{r,1}^n(l_{r,1} \vert m'_1, 1, 1, 1)$	$\ldots$	$\hat{y}_{r,B}^n(l_{r,B} \vert m'_{B-1}, m'_B, l_{r,B-2}, l_{r,B-1})$	$\hat{y}_{r,B+1}(1 \vert m'_B, 1, l_{r,B-1}, l_{r,B})$	$\hat{y}_{r,B+2}^n(1 \vert 1, 1, l_{r,B}, 1)$
V_d	$v_{d,1}^n(1)$	$\ldots$	$v_{d,B}^n(l_{d,B-2})$	$v_{d,B+1}^n(l_{d,B-1})$	$v_{d,B+2}^n(l_{d,B})$
X_d	$x_{d,1}^n(1 \vert 1)$	$\ldots$	$x_{d,B}^n(l_{d,B-1} \vert l_{d,B-2})$	$x_{d,B+1}^n(l_{d,B} \vert l_{d,B-1})$	$x_{d,B+2}^n(1 \vert l_{d,B})$
$\hat{Y}_d$	$\hat{y}_{d,1}^n(l_{d,1} \vert 1, 1)$	$\ldots$	$\hat{y}_{d,B}^n(l_{d,B} \vert l_{d,B-2}, l_{d,B-1})$	$\hat{y}_{d,B+1}^n(1 \vert l_{d,B-1}, l_{d,B})$	$\hat{y}_{d,B+2}^n(1 \vert l_{d,B}, 1)$
Y_d	$\hat{m}''_1$	$\ldots$	$\leftarrow (\hat{m}''_B, \hat{m}'_{B-1}, \hat{\mathbf{l}}_{B-2})$	$\leftarrow (\hat{m}'_B, \hat{\mathbf{l}}_{B-1})$	$\leftarrow \hat{\mathbf{l}}_B$

1) Codebook: Fix the pmf

$$\left[\prod_{k=2}^{N} P_{V_k} P_{X_k|V_k} P_{U_k|V_k}\right] \left[\prod_{r\in\mathcal{R}} P_{\hat{Y}_r|U_r V_r X_r Y_r}\right]$$
$$\times \left[\prod_{d\in\mathcal{D}} P_{\hat{Y}_d|V_d X_d Y_d}\right] P_{X_1|V_2^N U(\mathcal{R})} P_{Y_1^N|X_1^N}. \tag{59}$$

For block $b \in [1:B]$, split the message $m_b \in [1:2^{nR}]$ into (m'_b, m''_b), where m'_b and m''_b are independently and uniformly distributed over the sets $\in [1:2^{nR'}]$ and $[1:2^{nR''}]$, respectively, where $R', R'' \geq 0$ and so that

$$R = R' + R''. \tag{60}$$

Let $\mathbf{l}_{-1} = \mathbf{l}_0 = \mathbf{1}_{[N-1]}$ and $m''_{B+1} = m'_{B+1} = m''_{B+2} = m'_{B+2} = 1$.

For each $r \in \mathcal{R}$ and block $b \in [1:B+2]$, randomly and independently generate $2^{n(R'+\hat{R}_r)}$ sequences $v^n_{r,b}(m'_{b-1}, l_{r,b-2}) \sim \prod_{i=1}^n P_{V_r}(v_{r,b,i})$, with $m'_{b-1} \in [1:2^{nR'}]$ and $l_{r,b-2} \in [1:2^{n\hat{R}_r}]$. For each $(m'_{b-1}, l_{r,b-2})$, randomly and independently generate $2^{n\hat{R}_r}$ sequences $x^n_{r,b}(l_{r,b-1}|m'_{b-1}, l_{r,b-2}) \sim \prod_{i=1}^n P_{X_r|V_r}(x_{r,b,i}|v_{r,b,i})$. For each pair $(m'_{b-1}, l_{r,b-2})$, randomly and independently generate $2^{nR'}$ sequences $u^n_{r,b}(m'_b|m'_{b-1}, l_{r,b-2}) \sim \prod_{i=1}^n P_{U_r|V_r}(u_{r,b,i}|v_{r,b,i})$. For each $(m'_b, m'_{b-1}, l_{r,b-2}, l_{r,b-1})$, randomly and independently generate $2^{n\hat{R}_r}$ sequences $\hat{y}^n_{r,b}(l_{r,b}|m'_b, m'_{b-1}, l_{r,b-2}, l_{r,b-1}) \sim \prod_{i=1}^n P_{\hat{Y}_r|U_r X_r V_r}(\hat{y}_{r,b,i}|u_{r,b,i}, x_{r,b,i}, v_{r,b,i})$.

For each $d \in \mathcal{D}$ and block $b \in [1:B+2]$, randomly and independently generate $2^{n\hat{R}_d}$ sequences $v^n_{d,b}(l_{d,b-2}) \sim \prod_{i=1}^n P_{V_d}(v_{d,b,i})$, with $l_{d,b-2} \in [1:2^{n\hat{R}_d}]$. For each $l_{d,b-2}$, randomly and independently generate $2^{n\hat{R}_d}$ sequences $x^n_{d,b}(l_{d,b-1}|l_{d,b-2}) \sim \prod_{i=1}^n P_{X_d|V_d}(x_{d,b,i}|v_{d,b,i})$. For each $(l_{d,b-2}, l_{d,b-1})$, randomly and independently generate $2^{n\hat{R}_d}$ sequences $\hat{y}^n_{d,b}(l_{d,b}|l_{d,b-2}, l_{d,b-1}) \sim \prod_{i=1}^n P_{\hat{Y}_d|X_d V_d}(\hat{y}_{d,b,i}|x_{d,b,i}, v_{d,b,i})$.

For each $(m'_b, m'_{b-1}, \mathbf{l}_{b-2})$, randomly and independently generate $2^{nR''}$ sequences $x^n_{1,b}(m''_b|m'_b, m'_{b-1}, \mathbf{l}_{b-2}) \sim \prod_{i=1}^n P_{X_1|U(\mathcal{R})V_2^N}(x_{1,b,i}|v_{2,b,i}, \ldots, v_{N,b,i}, \{u_{r,b,i} : r \in \mathcal{R}\})$.

Let

$$\begin{aligned}
\mathbf{v}'^n_b(\mathcal{R}) &:= \{v^n_{r,b}(\hat{m}'_{b-1}, \hat{l}_{r,b-2}) : r \in \mathcal{R}\}\\
\mathbf{v}'^n_b(\mathcal{D}) &:= \{v^n_{d,b}(\hat{l}_{d,b-2}) : d \in \mathcal{D}\}\\
\mathbf{x}'^n_b(\mathcal{R}) &:= \{x^n_{r,b}(\hat{l}_{r,b-1}|\hat{m}'_{b-1}, \hat{l}_{r,b-2}) : r \in \mathcal{R}\}\\
\mathbf{x}'^n_b(\mathcal{D}) &:= \{x^n_{d,b}(\hat{l}_{d,b-1}|\hat{l}_{d,b-2}) : d \in \mathcal{D}\}\\
\mathbf{u}'^n_b(\mathcal{R}) &:= \{u^n_{r,b}(\hat{m}'_b|\hat{m}'_{b-1}, \hat{l}_{r,b-2}) : r \in \mathcal{R}\}\\
\hat{\mathbf{y}}'^n_b(\mathcal{R}) &:= \{\hat{y}^n_{r,b}(\hat{l}_{r,b}|\hat{m}'_b, \hat{m}'_{b-1}, \hat{l}_{r,b-2}, \hat{l}_{r,b-1}) : r \in \mathcal{R}\}\\
\hat{\mathbf{y}}'^n_b(\mathcal{D}) &:= \{\hat{y}^n_{d,b}(\hat{l}_{d,b}|\hat{l}_{d,b-2}, \hat{l}_{d,b-1}) : d \in \mathcal{D}\}.
\end{aligned}$$

2) Source encoding: At each block $b \in [1:B+1]$, after observing $y^n_{1,b}$, it looks for $\hat{\mathbf{l}}_{b-1}$ such that

$$\begin{gathered}
\big(x^n_{1,b}(m''_b|m'_b, m'_{b-1}, \hat{\mathbf{l}}_{b-2}), \mathbf{v}'^n_b(\mathcal{R}), \mathbf{v}'^n_b(\mathcal{D}), \mathbf{x}'^n_b(\mathcal{R}),\\
\mathbf{x}'^n_b(\mathcal{D}), \mathbf{u}'^n_b(\mathcal{R}), y^n_{1,b}\big) \in \mathcal{T}^n_{\epsilon/8}(P_{V_2^N X_1^N U_2^N Y_1})
\end{gathered}$$

where $\hat{m}''_b = m''_b$, $\hat{m}'_b = m'_b$ and $\hat{m}'_{b-1} = m'_{b-1}$, since the transmitter knows the source message it sent.

After finding compression indices $\hat{\mathbf{l}}_{b-1}$, in block $b+1$ the transmitter sends $x^n_{1,b+1}(m''_{b+1}|m'_{b+1}, m'_b, \hat{\mathbf{l}}_{b-1})$.

By the packing lemma, this step is successful with high probability if for all subset $\mathcal{J} \subseteq [2:N]$,

$$\hat{R}(\mathcal{J}) < I(X(\mathcal{J}); Y_1|X(\mathcal{J}^c), V_2^N, U(\mathcal{R}), X_1) - \delta(\epsilon/8). \tag{61}$$

3) Relay encoding: Relay nodes perform mixed compress-forward and partial decode-forward. In each block $b \in [1:B+1]$, assume Relay $r \in \mathcal{R}$ already knows $\hat{m}'_{b-1}$ from previous block. It looks for a unique index $\hat{m}'_b$ such that [7]

$$\begin{aligned}&\big(v^n_{r,b}(\hat{m}'_{b-1}, l_{r,b-2}), x^n_{r,b}(l_{r,b-1}|\hat{m}'_{b-1}, l_{r,b-2}),\\ &\quad u^n_{r,b}(\hat{m}'_b|\hat{m}'_{b-1}, l_{r,b-2}), y^n_{r,b}\big) \in \mathcal{T}^n_{\epsilon/6}(P_{X_rY_rU_rV_r}),\end{aligned}$$

then it compresses $y^n_{r,b}$ by finding a unique index $l_{r,b}$ such that

$$\begin{aligned}&\big(v^n_{r,b}, u^n_{r,b}, x^n_{r,b}, y^n_{r,b},\\ &\quad \hat{y}^n_{r,b}(l_{r,b}|\hat{m}'_b, \hat{m}'_{b-1}, l_{r,b-2}, l_{r,b-1})\big) \in \mathcal{T}^n_{\epsilon/4}(P_{V_rU_rX_rY_r\hat{Y}_r}).\end{aligned}$$

Then, in block $b+1$ it sends $x^n_{r,b+1}(l_{r,b}|\hat{m}'_b, l_{r,b-1})$.

By the covering and packing lemma, this step is successful with high probability if for $r \in \mathcal{R}$,

$$R' < I(U_r; Y_r|V_r, X_r) - \delta(\epsilon/6) \tag{62a}$$

$$\hat{R}_r > I(\hat{Y}_r; Y_r|V_r, X_r, U_r) + \delta(\epsilon/4). \tag{62b}$$

4) Receiver encoding: Receiver $d \in \mathcal{D}$ compresses $y^n_{d,b}$ by finding a unique index $l_{d,b}$ such that

$$\begin{aligned}&\big(v^n_{d,b}(l_{d,b-2}), x^n_{d,b}(l_{d,b-1}|l_{d,b-2}),\\ &\quad \hat{y}^n_{d,b}(l_{d,b}|l_{d,b-2}, l_{d,b-1}), y^n_{d,b}\big) \in \mathcal{T}^n_{\epsilon/4}(P_{V_dX_dY_d\hat{Y}_d}).\end{aligned}$$

Then, in block $b+1$ it sends $x^n_{d,b+1}(l_{d,b}|l_{d,b-1})$.

By the covering and packing lemmas, this step is successful with high probability if

$$\hat{R}_d > I(\hat{Y}_d; Y_d|V_d, X_d) + \delta(\epsilon/4), \quad \text{for } d \in \mathcal{D}. \tag{63}$$

5) Decoding: Receiver $d \in \mathcal{D}$ performs backward decoding. For each block $b \in [B+2, \dots, 1]$, it looks for $(\hat{m}''_b, \hat{m}'_{b-1}, \hat{\mathbf{l}}_{b-2})$ such that [8]

$$\begin{aligned}&\big(x^n_{1,b}(\hat{m}''_b|\hat{m}'_b, \hat{m}'_{b-1}, \hat{\mathbf{l}}_{b-2}), \mathbf{v}'^n_b(\mathcal{R}), \mathbf{v}'^n_b(\mathcal{D}), \mathbf{x}'^n_b(\mathcal{R}), \mathbf{x}'^n_b(\mathcal{D}),\\ &\quad \mathbf{u}'^n_b(\mathcal{R}), \hat{\mathbf{y}}'^n_b(\mathcal{R}), \hat{\mathbf{y}}'^n_b(\mathcal{D}), y^n_{d,b}\big) \in \mathcal{T}^n_\epsilon(P_{V_2^N X_1^N U(\mathcal{R}) \hat{Y}_2^N Y_d}).\end{aligned}$$

By the independence of the codebooks, the Markov lemma, packing lemma and induction on backward decoding, the decoding is successful with high probability if

$$\begin{aligned}&R + \hat{R}(\mathcal{T} \cup \mathcal{R})\\ &\quad < I(X_1, V(\mathcal{T} \cup \mathcal{R}), U(\mathcal{R}), X(\mathcal{T} \cup \mathcal{R}); \hat{Y}(\mathcal{T}^c \cap \mathcal{D}), Y_d|\\ &\qquad\qquad V(\mathcal{T}^c), X(\mathcal{T}^c \cap \mathcal{D}))\\ &\qquad + \sum_{k\in\mathcal{R}} H(\hat{Y}_k|X_k, U_k, V_k) + \sum_{j\in\mathcal{D}\cap\mathcal{T}} H(\hat{Y}_j|X_j, V_j)\\ &\qquad - H(\hat{Y}(\mathcal{T} \cup \mathcal{R})|V_2^N, X_1^N, U_2^N, \hat{Y}(\mathcal{T}^c \cap \mathcal{D}), Y_d) - \delta(\epsilon)\end{aligned} \tag{64}$$

---

[7] Since each Relay $r \in \mathcal{R}$ makes its own estimate of m'_b, the precise notation should be $\hat{m}'^{(r)}_b$. For simplicity, we omit the superscript (r).

[8] Receiver $d \in \mathcal{D}$ knows $l_{d,b-2}$ since it generated itself. Since each Receiver $d \in$ makes its own estimate of $(m''_b, m'_{b-1}, \mathbf{l}_{b-2})$, the precise notation is $(\hat{m}''^{(d)}_b, \hat{m}'^{(d)}_{b-1}, \hat{\mathbf{l}}^{(d)}_{b-2})$. For simplicity, we omit the superscript (d).

and

$$\begin{aligned}&R'' + \hat{R}(\mathcal{T})\\ &\quad < I(X_1,V(\mathcal{T}),U(\mathcal{T}),X(\mathcal{T});\hat{Y}(\mathcal{T}^c),Y_d|\\ &\qquad\qquad\qquad V(\mathcal{T}^c),X(\mathcal{T}^c),U(\mathcal{T}^c))\\ &\qquad + \sum_{k\in\mathcal{R}\cap\mathcal{T}} H(\hat{Y}_k|X_k,U_k,V_k) + \sum_{j\in\mathcal{D}\cap\mathcal{T}} H(\hat{Y}_j|X_j,V_j)\\ &\qquad - H(\hat{Y}(\mathcal{T})|V_2^N,X_1^N,U_2^N,\hat{Y}(\mathcal{T}^c),Y_d) - \delta(\epsilon)\end{aligned} \tag{65}$$

for all $\mathcal{T} \subset [2:N]$ with $\mathcal{T}^c \cap \mathcal{D} \neq \emptyset$ and $U_d = \emptyset$, for all $d \in \mathcal{D}$.

Combining (60–65), and using Fourier-Motzkin elimination to eliminate $R', R'', \hat{R}_2, \dots, \hat{R}_N$, we obtain Theorem 4.

VIII. CONCLUSION

REFERENCES

[1] E. C. van der Meulen, “Three terminal communication channels,” *Adv. Appl. Probab.*, vol. 3, pp. 120–154, 1971.

[2] T. M. Cover and A. El Gamal, “Capacity theorems for the relay channel,” *IEEE Trans. Inf. Theory*, vol. 25, no. 5, pp. 572–584, Sep. 1979.

[3] G. Kramer, M. Gastpar and P. Gupta, ”Cooperative strategies and capacity theorems for relay networks,” *IEEE Trans. Inf. Theory*, vol. 51, no. 9, pp. 3037–3063, Sep. 2005.

[4] L.-L. Xie and P. R. Kumar, “An achievable rate for the multiple-level relay channel,” *IEEE Trans. Inf. Theory*, vol. 51, no. 4, pp. 1348–1358, Apr. 2005.

[5] M. H. Yassaee and M. R. Aref, “Slepian-Wolf coding over cooperative relay networks,” *IEEE Trans. Inf. Theory,* vol. 57, no. 6, pp. 3462–3482, Jun. 2011.

[6] M. Yassaee and M. Aref, “Generalized compress-and-forward strategy for relay networks,” *Information Theory (ISIT), 2008 IEEE International Symposium on*, Toronto, Canada, pp. 2683–2687, July 2008.

[7] J. Li and Y.-H. Kim, “Partial decode-forward relaying for the Gaussian two-hop relay network,” Aug. 2015, available at http://arxiv.org/abs/1508.00443v1.

[8] S. Lim, Y-Han Kim, A. El Gamal and S-Y Chung, “Noisy network coding,” *IEEE Trans. Inf. Theory*, vol. 57, no. 5, pp. 3132–3152, May 2011.

[9] J. Hou and G. Kramer, “Short message noisy network coding with a decode-forward option,” *IEEE Trans. Inf. Theory*, vol. 62, no. 1, pp. 89–107, Jan 2016.

[10] S. Lim, K. T. Kim and Y-Han Kim, “Distributed decode-forward for multicast,” *Information Theory Workshop (ITW), 2014 IEEE*, pp. 556–560, Nov. 2014.

[11] S. Lim, K. T. Kim and Y-Han Kim, “Distributed decode-forward for broadcast,” *Information Theory (ISIT), 2014 IEEE International Symposium on*, pp. 636–640, June, 2014.

[12] B. E. Schein, “Distributed coordination in network information theory,” Ph.D. Thesis, Massachusetts Institute of Technology, Cambridge, MA, Sep. 2001.

[13] S. Agnihotri, S. Jaggi and M. Chen, “Amplify-and-forward in wireless relay networks,” Jun. 2011, preprint available at http://arxiv.org/abs/1105.2760.

[14] I. Maric, A. Goldsmith,and M. Medard, “Multihop analog network coding via amplify-and-forward:The high SNR regime,” *IEEE Trans. Inf. Theory*, vol. 58, no. 2, pp. 793–803, Feb. 2012.

[15] U. Niesen and S. Diggavi, “The approximate capacity of the Gaussian N-relay diamond network,” *IEEE Trans. Inf. Theory* vol. 59, no. 2, pp. 845–859, Feb. 2013.

[16] Y-Han Kim, S. Lim and P. Minero, “Relaying via hybrid coding,” *Information Theory (ISIT), 2011 IEEE International Symposium on*, pp. 1881–1885, July, 2011.

[17] Y. Gabbai and S. I. Bross, “Achievable rates for the discrete memoryless relay channel with partial feedback configurations,” *IEEE Trans. Inf. Theory*, vol. 52, no. 11, pp. 4989–5007, Nov. 2006.

[18] F. M. J. Willems and E. C. van der Meulen, “Partial feedback for the discrete memoryless multiple-access channel,” *IEEE Trans. Inf. Theory*, vol. 29, no. 2, pp. 287–290, Mar. 1983.

[19] Y. Wu and M. Wigger, “Coding schemes with rate-limited feedback that improve over the no feedback capacity for a large class of broadcast channels,” *IEEE Trans. Inf. Theory*, vol. 62, no. 4, pp. 2009–2033, April 2016.

[20] T. M. Cover and J. A. Thomas, *Elements of Information Theory*. New York: Wiley, 1991.

[21] H. Chong, M. Motani and H. Garg, “New coding strategies for the relay channel,” *Information Theory (ISIT), 2005 IEEE International Symposium on*, pp. 1086–1090, Sept. 2005.

[22] S. Zahedi, “On reliable communication over relay channels,” Ph.D thesis. Stanford: Stanford University, 2005.

[23] A. El Gamal and Y-Han Kim, *Network information theory.* Cambridge, U.K.: Cambridge Univ. Press, 2011.